




WORKHOLDING AND AUTOMATION



# WORKHOLDING FOR ROTARY OPERATIONS

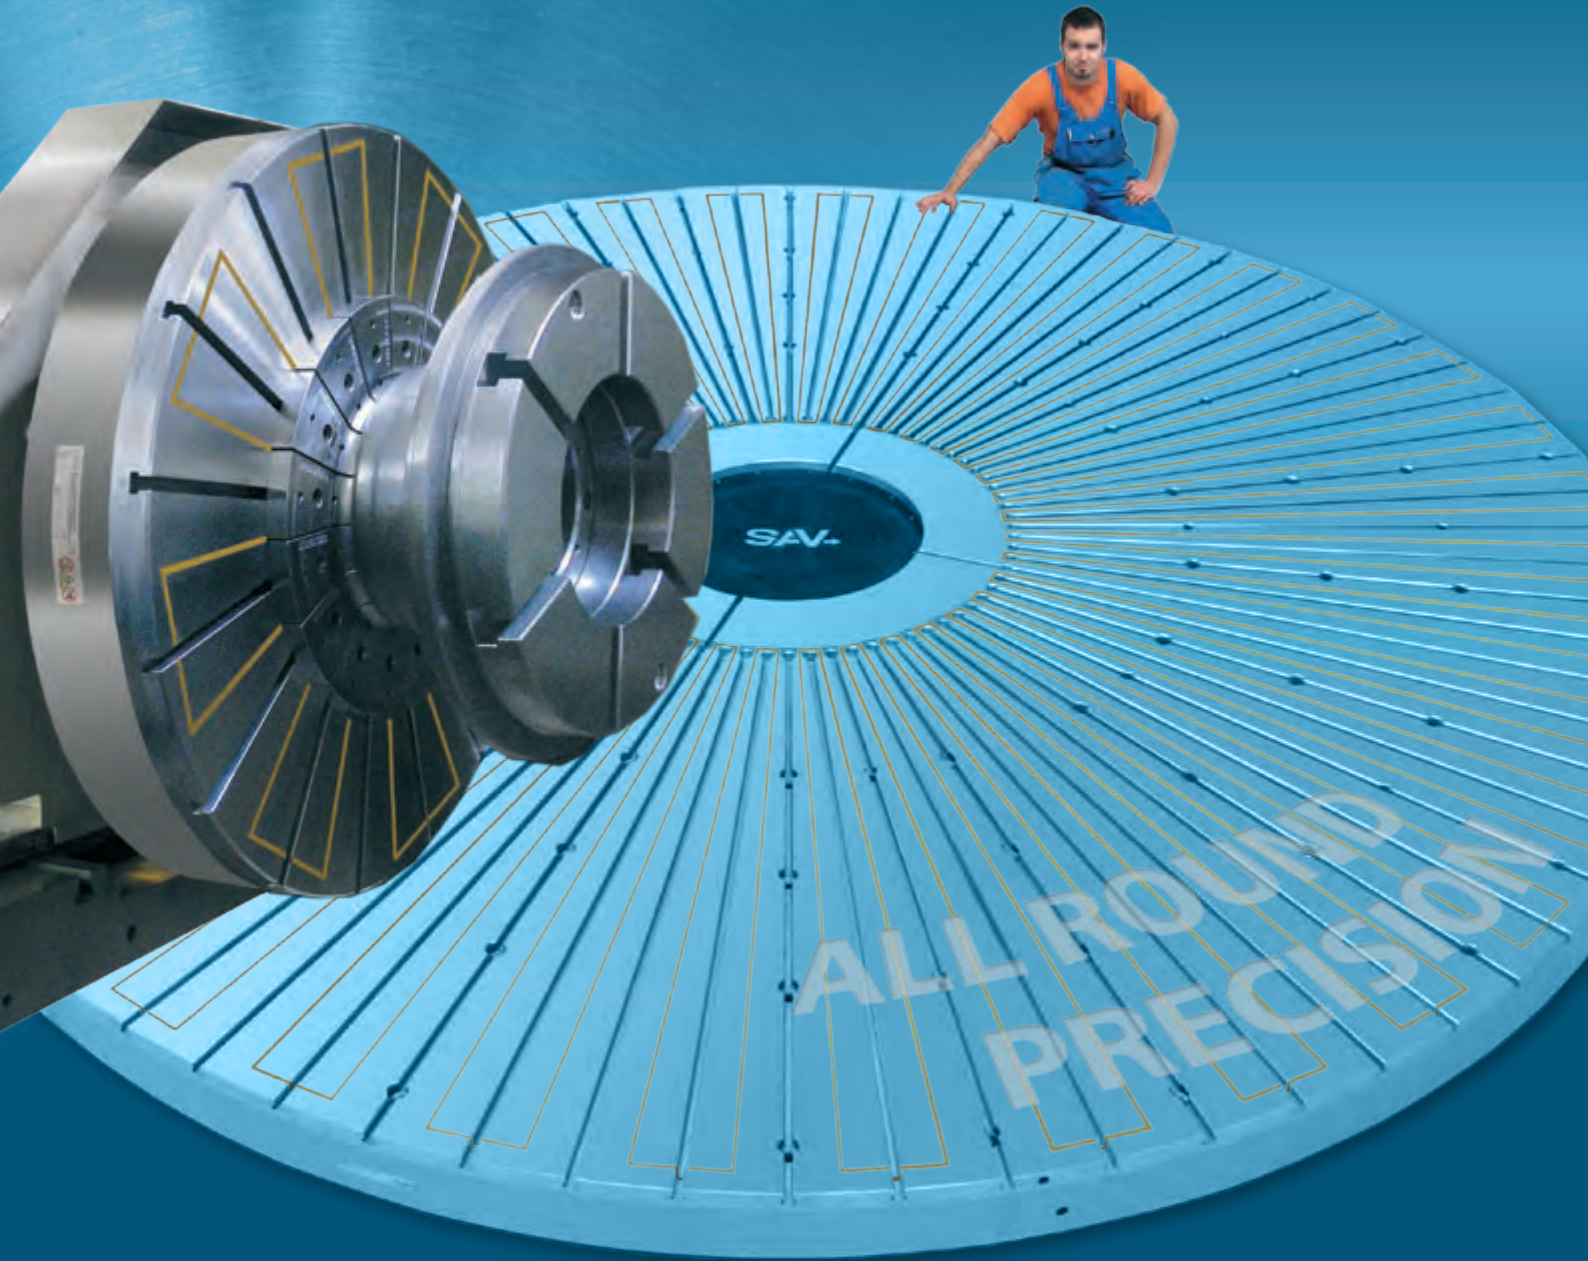

YEARS  
**25** SUPERIOR TECHNOLOGY  
IN **ROTARY WORKHOLDING**

MAGNETIC  
HYDRAULIC  
MECHANIC  
VACUUM

 market  
**LEADER** **FOR** highest performance  
**AND QUALITY**



According ISO 9001/2000



## PRODUCTION TECHNOLOGY

### TOP QUALITY WORKHOLDING

Own production with:

- ➔ 55 machine centers up to 5000 x 3000 machining surface
- ➔ 50 profile-/ surface-/ coordinate-/ external- and internal circular grinding machines up to 4000 mm machining length

### SAV → GUARANTEES

- ➔ Quality, reliability and longevity
- ➔ Efficiency
- ➔ Precision solutions
- ➔ Problem solving competence
- ➔ From Workpiece to Process – Handling and Automation
- ➔ The right principle: magnetic, hydraulic, mechanic, vacuum
- ➔ Flexibility of design manufactured in SAV factory
- ➔ Innovation – new technologies

### ELECTROMAGNETIC AND ELECTRO-PERMANENT MAGNETIC CHUCKS WITH DEMAGNETIZING CYCLE

The requirements of our customers determine our products and the company philosophy.

- ➔ 12 wire- and spark erosion machines
- ➔ 4 CNC-lathes and 1 facing-lathe with table diameter Ø 3000 mm
- ➔ 4 Coordinate measuring machines


### Large magnets from one piece

- ➔ Minimum clamping and setting times
- ➔ 3-side machining
- ➔ Universal and flexible
- ➔ Wear resistant solid state construction
- ➔ Reliable in process and clamping
- ➔ High efficiency
- ➔ Stable mono block construction
- ➔ Extreme holding forces
- ➔ Optimum workpiece damping
- ➔ Use of complete machine table surface
- ➔ High accuracy due to full surface force distribution
- ➔ Good automation possibility

### PRECISION MADE IN GERMANY



Manufacturing magnet body  
Ø 4100 mm

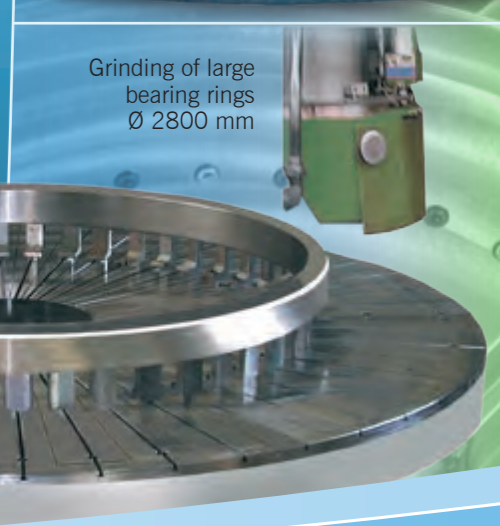


Grinding of large bearing rings  
Ø 2800 mm





## SAV MAGNETS FOR TURNING / HARD TURNING

*Quality and precision also in large sizes*

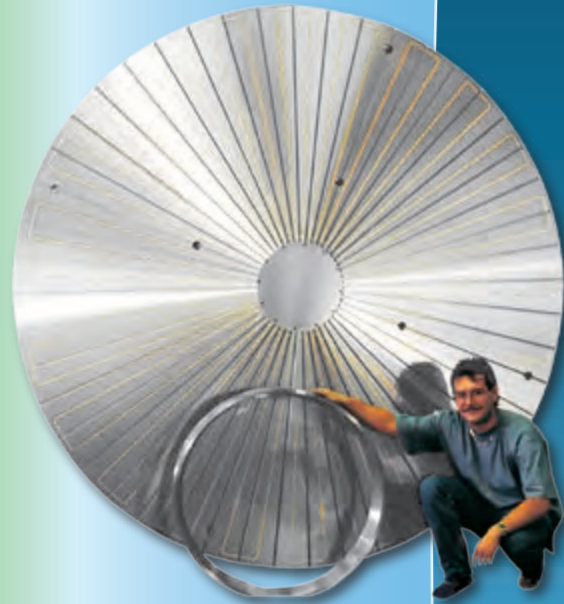

Electro-Permanent Magnetic Chuck manufactured from one piece. Ø 3200 mm

Production advantages with magnetic clamping:

- Precision chip removal from 3 sides in one set-up
- Down pulling of the reference surfaces
- Full surface holding force with big damping for superior machining surface quality
- Most economic clamping tool with effortless machine integration
- Flexibility through large workpiece clamping range
- Removal of internal workpiece stresses during production

Test results with hard turning of a ring Ø 600 mm

Form- resp. surface quality	Reproducible quality magnetic chuck	Potential improvement *
Arithmetic middle roughness	0.3 µm	0% to 25%
Circular form difference	0.5 µm	75% to 90%
Cylindrical form failure	10 µm	80% to 85%
Wall thickness variation	25 µm	60% to 80%

\* potential improvement in comparison with conventional methods

## SAV MECHANIC AND HYDRAULIC CHUCKS

Powered solutions for

- Extreme chip removal
- Precision clamping with point supports / point clamping, no pull-down of uneven parts
- Shaft clamping with centre offset
- Clamping of rings without deformation
- Fine turning operations

**Column chucks**



**Rotary finger chucks**



**Compensating chucks**



**6-jaw lever compensating chucks**



**Centering and Face clamping chucks**



*Force – well proportioned, used smart*




3-jaw Tipping Lever Chuck for gear box flanges


## SAV MAGNETS FOR CIRCULAR AND CENTERLESS GRINDING

The proven SAV precision products offer:

- Highest accuracies in first and second clamping set-up
- Internal coolant supply
- Combined grinding of 3 sides
- Large workpiece clamping range
- Also small, difficult workpieces can be clamped through shoe-centerless grinding
- Simple automation
- Workpiece eccentric to spindle
- Magnet for rotary movement
- Precision through sliding shoes

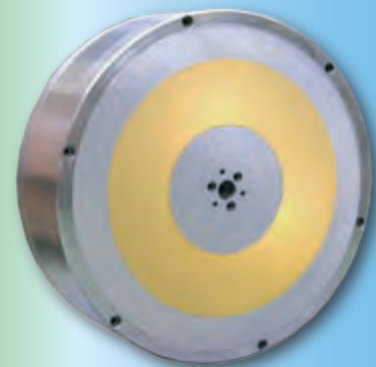


Electromagnetic circular chuck Ø 500 mm for shoe centerless grinding applications

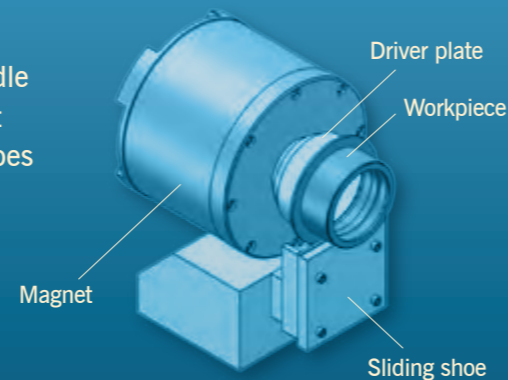

## SAV COMBINED SOLUTIONS

The combination of magnetic, hydraulic, mechanic and electrical power offer:

- Delicate and deformation-less clamping
- Simple automation
- Measuring of movement and force during operation process
- Reproducible centering
- Combination of first and second clamping radial and/or axial
- Oversize optimized centering

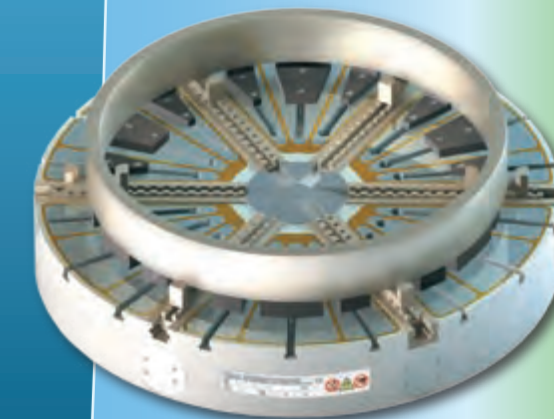

## MAGNETIC WORKHOLDING – SELECTION CRITERIA

Operation	Work-pieces	Selection Criteria	Products
Turning / Hard turning – Vertical spindle	 For ring shaped workpieces	<ul style="list-style-type: none"> <li>• High holding forces</li> <li>• High rotation speed range</li> <li>• Even pole division at perimeter</li> <li>• Flexible modification of diameter range</li> <li>• Safety and independence of electrical supply</li> <li>• High stiffness for machining of large parts</li> </ul>	 <b>SAV 244.70 / .71</b> Upto $\varnothing$ 5000 mm and bigger
	 For disc shaped workpieces	<ul style="list-style-type: none"> <li>• High forces at low magnetic field height</li> <li>• Safety and independence of electrical supply</li> <li>• High rotation speed range</li> </ul>	 <b>SAV 244.72</b> Upto $\varnothing$ 1600 mm   <b>SAV 244.73</b> Upto $\varnothing$ 800 mm
Turning / Hard turning – Horizontal spindle	 For ring shaped workpieces	<ul style="list-style-type: none"> <li>• High holding forces</li> <li>• High rotation speed range</li> <li>• Flexible modification of diameter range</li> <li>• Safety and independence of electrical supply</li> <li>• Simple energy supply</li> <li>• Holding force regulation of EP magnets for centering of workpieces possible</li> </ul>	 <b>SAV 244.06</b> Upto $\varnothing$ 500 mm   <b>SAV 244.70 / .71</b> Upto $\varnothing$ 800 mm
	 For disc shaped workpieces	<ul style="list-style-type: none"> <li>• High forces at low magnetic field height</li> <li>• Safety and independence of electrical supply</li> <li>• High rotation speed range</li> <li>• Simple energy supply</li> <li>• Holding force regulation of EP magnets for centering of workpieces possible</li> </ul>	 <b>SAV 244.02</b> Upto $\varnothing$ 500 mm   <b>SAV 244.72</b> Upto $\varnothing$ 800 mm   <b>SAV 244.73</b> Upto $\varnothing$ 800 mm

Operation	Work-pieces	Selection Criteria	Products
Grinding vertical / horizontal	 For ring shaped workpieces	<ul style="list-style-type: none"> <li>• High precision</li> <li>• Even pole division</li> <li>• Flexible modification of diameter range</li> <li>• High stiffness</li> <li>• Good holding force regulation for Electro</li> <li>• Permanent Circular Magnets</li> </ul>	 <b>SAV 244.06</b> Upto $\varnothing$ 500 mm   <b>SAV 244.40 / .70</b> Upto $\varnothing$ 5000 mm and bigger
	 For disc shaped workpieces	<ul style="list-style-type: none"> <li>• High precision</li> <li>• Low magnetic field height supply</li> <li>• Good holding force regulation for Electro</li> <li>• Permanent Circular Magnets</li> <li>• For multiple loading with small workpieces</li> <li>• Also for thin workpieces</li> </ul>	 <b>SAV 244.02</b> Upto $\varnothing$ 500 mm   <b>SAV 244.41 / .72</b> Upto $\varnothing$ 1600 mm   <b>SAV 244.73</b> Upto $\varnothing$ 800 mm
Shoe center-less grinding	 For ring shaped workpieces	<ul style="list-style-type: none"> <li>• High precision</li> <li>• Bigger, flexible clamping range</li> <li>• Extreme air gap behavior</li> </ul>	 <b>SAV 244.45</b> Upto $\varnothing$ 500 mm
Grinding of small parts	 For instance $\varnothing$ 6 x 5 mm   For instance $\varnothing$ 40 x 0,8 mm	<ul style="list-style-type: none"> <li>• Extreme holding forces</li> <li>• High precision</li> <li>• High stiffness</li> <li>• Low magnetic field height</li> <li>• Fine, real pole pitch</li> </ul>	 <b>SAV 244.07</b> Upto $\varnothing$ 200 mm



## ELECTRO-PERMANENT CIRCULAR MAGNETS SAV 244.70

## SAV 244.71

With radial poles and strong magnetic field

With radial poles, enhanced magnetic system and extra high holding force

### Workpiece clamping with high precision circular magnets


### Workpiece clamping with high performance circular magnets

#### Execution:

- Solid constructed pole plate
- Switching off through demagnetizing cycle
- Electro-permanent system, guaranteeing safe operation during power failure
- Pole separation with brass in-lays for optimal wear behavior
- 8 mm consumption of pole plate
- Heat treated tension free body
- Available with flange on request
- Internal water cooling possible
- T-slots for pole raisers optional

#### Execution:

- Even, strong magnetic field
- Solid designed pole plate
- Switching off through demagnetizing cycle
- Electro-permanent system, guaranteeing safe operation during power failure
- Pole separation with brass in-lays for optimal wear behavior
- Also available with T-slots 10H10 for optional pole raisers for 3-side machining
- 8 mm consumption of pole plate
- Heat treated tension free body

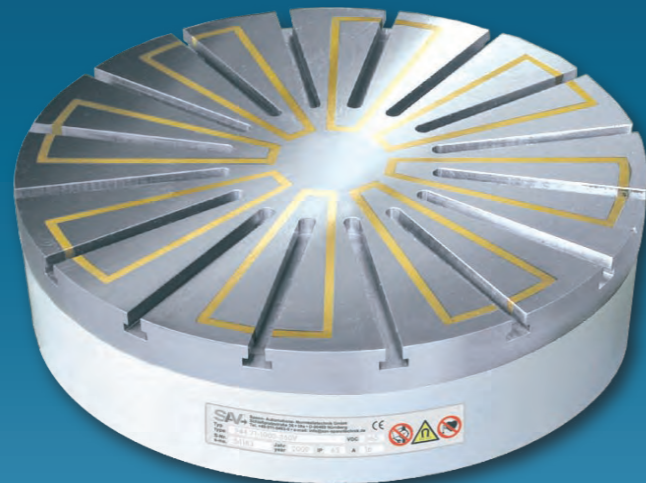

#### Application:

Mainly for precision grinding operations of small and big workpieces on rotary tables and circular grinding machines.

#### Application:

- Hard turning operations and extreme chip removal with turning of small and large workpieces
- Grinding operations with highest accuracy


Dimensions in mm		Magnetic active range from Ø upto Ø in mm	Pole pairs	Weight in kg	Control unit max. current in A
Diameter	Height <sup>0*</sup>				
300	90	60 - 280	6	42	30
400	90	70 - 360	6	76	30
500	90	100 - 460	8	120	30
600	100	100 - 560	8	195	30
800	100	150 - 764	12	365	30
1000	100	200 - 964	12	550	60
1200	110	300 - 1150	18	990	60 x 2
1500	120	300 - 1450	18	1550	60 x 2
1600	120	300 - 1550	18	1760	60 x 2

Bigger diameters on request  
\* for execution with T-slots the height increases with 10 mm  
Adaption to spindle according requirements


Dimensions in mm		Magnetic active range from Ø upto Ø in mm	Pole pairs	Weight in kg	Control unit max. current in A
Diameter	Height <sup>0*</sup>				
300	100	60 - 280	6	54	30
400	100	70 - 360	6	85	30
500	110	100 - 460	8	150	30
600	110	100 - 560	8	210	30
800	110	150 - 764	12	380	30
1000	125	200 - 964	12	680	60
1200	125	300 - 1150	18	975	60 x 2
1500	135	300 - 1450	18	1850	60 x 2
1600	135	300 - 1550	18	2105	60 x 2

Bigger diameters on request  
\* for execution with T-slots the height increases with 10 mm  
Adaption to spindle according requirements

- Equal pole pitch within circle range; for ring shaped workpieces




- Minimum workpiece height; 35% of the pole pitch (P) at the given pitch circle diameter




- Also for thin rings



- Equal pole pitch within circle range; therefore also suitable for ring shaped workpieces



- Minimum workpiece height; 35% of the pole pitch (P) at the given pitch circle diameter



- Also for thin rings



#### Nominal holding force:

- 120 N/cm<sup>2</sup>
- adjustable by control unit

#### Nominal operating voltage:

- 210 V DC upto Ø 400 mm diameter
- 360 V DC above Ø 400 mm diameter

#### Nominal holding force:

- 170 N/cm<sup>2</sup> on inducible steel surface
- adjustable through control unit with coded switch

#### Nominal operating voltage:

- 360 V DC magnet voltage





## ELECTRO-PERMANENT CIRCULAR MAGNETS SAV 244.72


## SAV 244.73





### Multiple clamping - high precision -


#### Execution:

- Gap free construction of pole plate
- Evenly distributed, strong magnetic field
- Solid constructed pole plate
- Switching off through demagnetizing cycle
- Electro-permanent system, guaranteeing safe operation during power failure
- Pole separation with brass in-lays for optimal wear behavior
- 8 mm consumption of pole plate

- Uniform holding force distribution due to concentric pole arrangement 
- Suitable for thin and flat workpieces (e.g. saw blades)

- Multiple workpiece clamping possible on pitch circle diameter 

- For workpieces with minimum thickness X:  
2 mm at pole pitch = 4.5 mm  
4 mm at pole pitch = 9 mm  
8 mm at pole pitch = 18 mm 

- For thin workpieces with minimum size 45x45 mm 

#### Nominal holding force:

- P = 4.5 mm: 80 N/cm<sup>2</sup>
- P = 9 mm: 100 N/cm<sup>2</sup>
- P = 18 mm: 110 N/cm<sup>2</sup>
- adjustable by control unit through coded switch

#### Nominal operating voltage:

- 210 V DC upto Ø 500 mm diameter
- 360 V DC above Ø 500 mm diameter

With concentric poles



With fine pole pitch P = 4 mm



#### Application:

Mainly for precision grinding operations of small and big workpieces on rotary tables and circular grinding machines. Because of cylindrical pole arrangement it is also suitable for holding groups of randomly placed mass-production pieces.

Dimensions in mm		Magnetic active range from Ø upto Ø in mm	Weight in kg	Control unit max. current in A
Diameter	Height $h_1$			
300	105	60 - 280	52	30
400	105	70 - 360	89	30
500	105	100 - 460	141	30
600	105	100 - 560	204	60
800	105	150 - 764	383	60
1000	105	200 - 964	578	60
1200	125	300 - 1150	990	60 x 2
1500	125	300 - 1450	1550	60 x 2
1600	125	300 - 1550	1765	60 x 2

Available with pole pitch 4.5 mm, 9 mm and 18 mm.

#### Application:


For grinding of thin, plate shaped workpieces. Suitable for clamping of multiple small parts.


Dimensions in mm		Magnetic active range from Ø upto Ø in mm	Weight in kg	Control unit max. current in A
Diameter	Height $h_1$			
300	100	213	55	30
400	100	301	98	30
500	100	401	153	30
600	100	481	220	60
700	100	581	300	60
800	100	681	392	60

### Thin parts clamped accurately !

#### Execution:

- Pole plate with very small, parallel pole division, 3 mm steel and 1 mm brass
- Low height
- Laminations glued and reinforced with tie bars
- Low magnetic field height; 4 mm
- Switching-off through demagnetizing cycle
- Heat treated tension free body
- Threaded mounting holes in back-side. Through holes on request
- Electro-permanent system, guaranteeing safe operation during power failure
- 8 mm consumption of pole plate

- For grinding of thin plates, wide rings with low thickness and minimum width 40 mm 

- For workpieces with minimum thickness 2 mm 
- For flat workpieces, minimum 40x40 mm<sup>2</sup>

#### Nominal holding force:

- 100 N/cm<sup>2</sup>
- adjustable through control unit through coded switch

#### Nominal operating voltage:

- 360 V DC





## ELECTRO CIRCULAR MAGNETS

SAV 244.40

SAV 244.41



With radial poles and high holding forces


Strong and low magnetic field though concentric poles

### Strong and reproducible


#### Execution:

- Evenly distributed, strong magnetic field
- Solid constructed pole plate
- Switching off through demagnetizing
- Pole separation with brass in-lays for optimal wear behavior
- Also available with T-slots 10H10 for optional pole raisers for 3-side machining
- 8 mm consumption of pole plate
- Duty cycle 100%
- Internal water cooling possible

- Equal pole pitch within circle range; for ring shaped workpieces



- Minimum workpiece height; 35% of the pole pitch (P) at the given pitch circle diameter



- Also for thin rings



#### Nominal holding force:

- 120 N/cm<sup>2</sup>
- adjustable by control unit

#### Nominal operating voltage:

- 24 V DC upto Ø 300 mm diameter
- 110 V DC for all other sizes



#### Application:

For circular grinding of cylindrical and ring shaped workpieces on vertical internal and external grinding machines. Also suitable for turning operations with form and position tolerances of 0.01 mm to 0.02 mm.

Dimensions in mm		Magnetic active range from Ø upto Ø in mm	Pole pairs	Weight in kg	Power in W
Diameter	Height <sup>o</sup>				
300	90	60 - 280	6	42	90
400	90	70 - 360	6	76	150
500	90	100 - 460	8	120	190
600	100	100 - 560	8	195	265
800	100	150 - 764	12	365	440
1000	100	200 - 964	12	550	660
1200	110	300 - 1150	18	990	960
1500	120	300 - 1450	18	1550	1440
1600	120	300 - 1550	18	1760	1630

Bigger diameters on request



#### Application:

Mainly for precision grinding operations of disc shaped workpieces on rotary tables, internal and external circular grinding machines.

Not suitable for thin rings. Because of cylindrical pole arrangement it is also suitable for holding groups of randomly placed mass-production pieces.

Also for turning operations with form and position tolerances of 0.01 mm to 0.02 mm.

Dimensions in mm		Magnetic active range from Ø upto Ø in mm	Weight in kg	Power in W
Diameter	Height <sup>o</sup>			
300	100	60 - 280	42	90
400	100	70 - 360	92	150
500	100	100 - 460	144	190
600	100	100 - 560	208	264
800	100	150 - 764	369	440
1000	100	200 - 964	577	660
1200	110	300 - 1150	989	960
1500	120	300 - 1450	1545	1440
1600	120	300 - 1550	1760	1630

Larger sizes on request.  
Available with pole pitch 4.5 mm, 9 mm and 18 mm.

### Everything is round !

#### Execution:

- Pole separation with brass in-lays for optimal wear behavior
- Switching off through demagnetizing cycle
- Gap free construction of pole plate
- 8 mm consumption of pole plate
- Duty cycle 100%

- Uniform holding force distribution due to concentric pole arrangement
- Suitable for thin and flat workpieces (e.g. saw blades)

- Multiple workpiece clamping possible on pitch circle diameter

- For workpieces with minimum thickness X:
- 2 mm at pole pitch = 4.5 mm
- 4 mm at pole pitch = 9 mm
- 8 mm at pole pitch = 18 mm

- For thin workpieces with minimum size

#### Nominal holding force:

- P = 4.5 mm: 80 N/cm<sup>2</sup>
- P = 9 mm: 100 N/cm<sup>2</sup>
- P = 18 mm: 110 N/cm<sup>2</sup>
- adjustable by control unit through

#### Nominal operating voltage:

- 24 V DC upto Ø 300 mm diameter
- 110 V DC for all other sizes





## ELECTRO CIRCULAR MAGNETS

SAV 244.43


With fine pole pitch, for machining of thin parts

**For universal use !**

### Execution:

- Pole plate with very small, parallel pole division, 3 mm steel and 1 mm brass
- Low height
- Laminations glued and reinforced with tie bars
- Low magnetic field height; 4 mm
- Switching-off through demagnetizing cycle
- Heat treated tension free body
- Threaded mounting holes in backside. Through holes on request
- 8 mm consumption of pole plate
- Robust and watertight!
- Duty cycle 100%

- For grinding of thin plates, wide rings with low thickness



- For workpieces with minimum thickness 2 mm



- For flat workpieces, minimum 40x40 mm

### Nominal holding force:

- 100 N/cm<sup>2</sup>
- adjustable through control unit

### Nominal operating voltage:

- 110 V DC



### Application:

For grinding of thin plates, wide rings with low thickness. Suitable for clamping of multiple small parts.

Dimensions		Magnetic active range from Ø upto Ø in mm	Weight in kg	Power in W
Diameter	Height <sup>o</sup>			
300	100	213	55	110
400	100	301	98	180
500	100	401	153	230
600	100	481	220	410
700	100	581	300	430
800	100	681	392	540



## SLIDING SHOE GRINDING MAGNETS

SAV 244.45

With pot-magnetic system for large workpiece range

**Strong –  
Universal –  
Precise !**

### Execution:

- Extreme magnetic field for grinding of large workpiece range
- Delivery with driver according requirements
- Adaption to spindle on request
- On request with changeable pole plates for large clamping range
- For simple workpiece handling, easy automation
- Internal coolant supply possible


### Nominal operating voltage, advised:

- 24 V DC upto diameter 250 mm
- 110 V DC above diameter 250 mm

### Application:

- For grinding of small rings with limited workpiece contact surface
- Extreme low wall thickness variation through centerless workpiece clamping and positioning over static sliding shoes
- Simple changing through universal workpiece driver
- Universal use for large diameter range
- For clamping of workpieces upto Ø500 mm diameter
- Workpiece out of spindle center
- Magnet for turning movement, precision through sliding shoes

Dimensions in mm		Weight in kg	Power in W
Diameter	Height <sup>o</sup>		
150	130	23	25
200	130	40	40
250	160	80	62
300	160	113	90
400	180	225	140
450	180	285	180
500	200	390	250

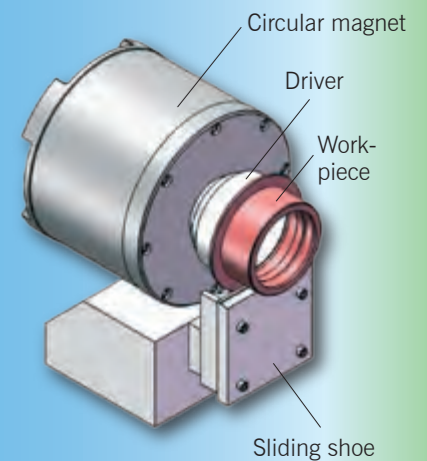





## SAV SPECIAL MAGNETIC SOLUTIONS


### Special electromagnetic chuck

- for automatic grinding of ferrite cores
- 16 individual switchable magnetic segments



Electro-permanent circular magnet, combined pole division for grinding of sleeves and plates



Electro-permanent ring magnet for turbine parts

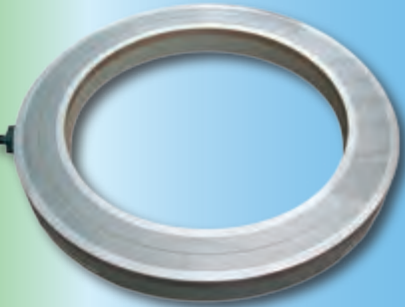


Electro circular magnet in segments, Ø5400 mm, for machining of slewing bearings

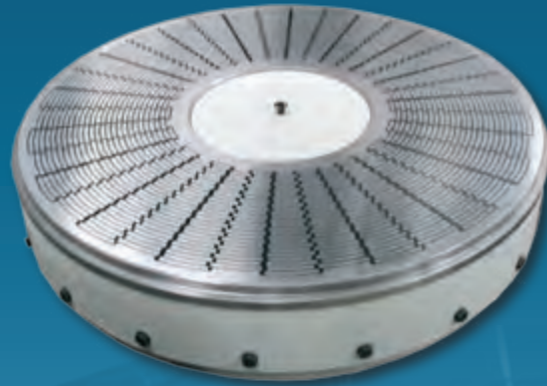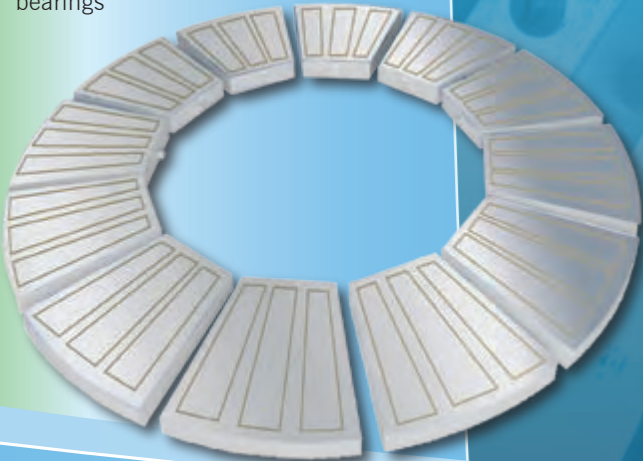

### Changing pole plate in special execution

- rotating pole plate, static magnetic system
- for automatic grinding of bearing parts
- 24 individual magnetic segments

### Special clamping tool for coordinate grinding of Maltese cross drives

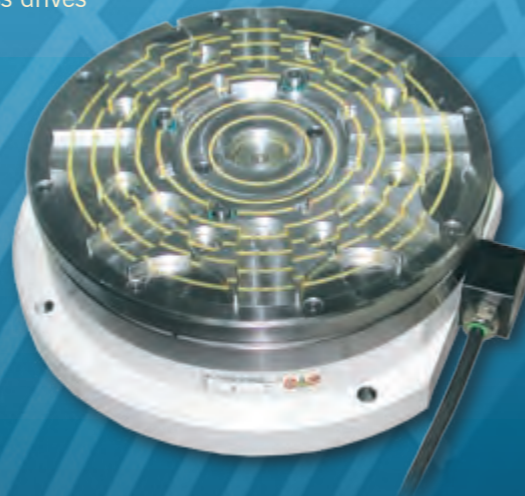

## SAV LARGE MAGNET PRODUCTION




### SAV magnets for machining of large parts offer:


- ➔ Accuracy and high stiffness of magnet body and pole plates, also at overhang to machine table
- ➔ Long time stability through stress-free heat treated components
- ➔ Large magnetic active ranges
- ➔ High rotation speeds
- ➔ Large magnets also in one piece
- ➔ Very small magnetic "dead" zones
- ➔ High quality on evenness and parallelism according requirements
- ➔ Individual spindle adaption
- ➔ Extreme large diameters, for instance Ø 12 m, in segment construction



Ø 3200 mm

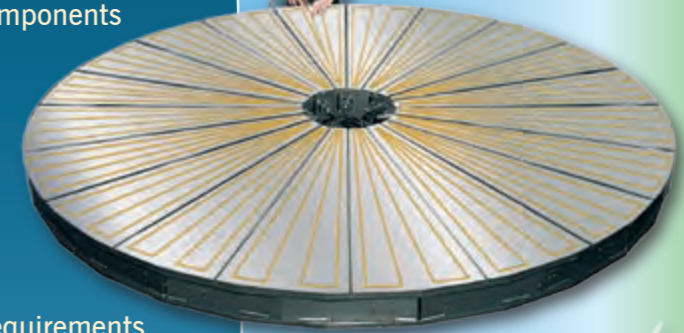

powerful  
precise  
longevity

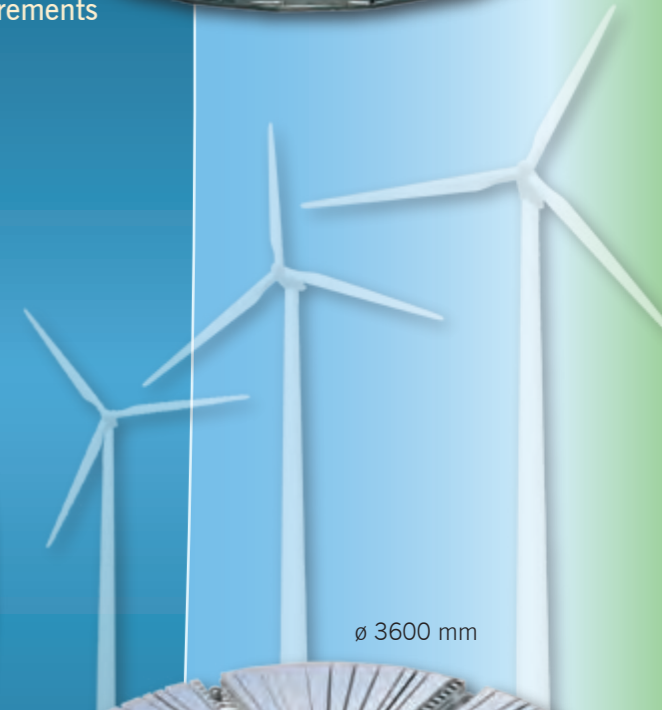

Ø 3600 mm







### SAV MECHATRONIC CHUCK

SAV 244.75


### SPECIAL COMBINED CHUCK

SAV 244.99



*The clever combination !*

**PATENT PENDING**

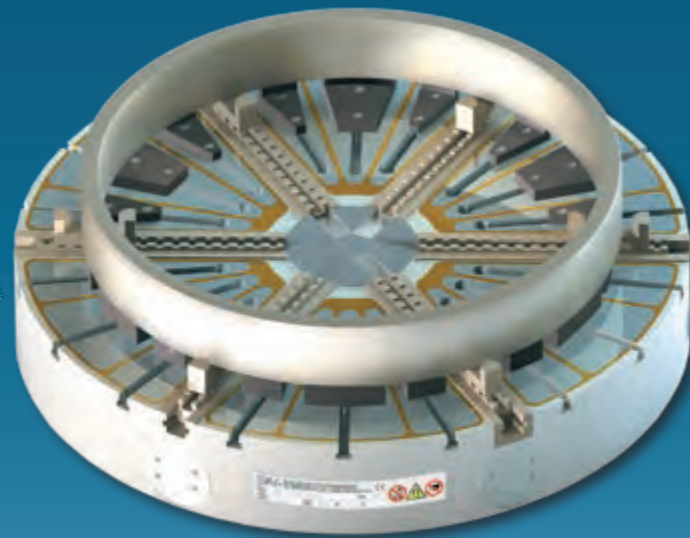


#### Combination circular magnet – electric linear axis:

- Servo drive with integrated brakes
- 300 daN clamping force per actuator at Ø1000 mm
- Direct measuring system with resolution 0.001 mm
- 50 mm clamping stroke with quick change jaws
- Electronic centrifugal force compensation
- Enhanced magnetic system with optimized pole division
- Magnetic material under each pole for minimum field heights
- Ø350 mm minimum magnetic area
- Smallest chuck diameter Ø800 mm at 100 daN clamping force per jaw
- With 165 mm minimum height
- Available end 2010

#### Application:

- For automation
- Precise centering, reproducible with high accuracy
- High power chip removal and finishing
- Combination first and second set-up
- Clamping radial and/or axial
- Clamping of eccentric parts



#### Variant A

- 3 Axis centric
- 3 Axis internal or external engaging



#### Variant D

- Manual workpiece positioning with dial gauge
- Magnetic pre-clamping
- 6 axis individual engaging and clamping




#### Variant B

- 6 axis centric
- internal or external engaging



#### Variant E

- Centric per 2 facing axis



#### Variant C

- Clamping of oval parts



#### Variant F

- Clamping external parts at changing positioning to spindle

#### Combined solutions can be applied usefully when:

- Full surface and/or selective power introduction is required for the same workpiece
- Changing devices are applied
- High accurate centering possibilities are required
- Extreme chip removal at small workpiece dimensions must be realized
- Combined clamping axial / vertical is required


Electro-permanent magnet with mechanic centering system on pole raisers



Combined chuck from high energy magnet and precision lamination-centering



Special clamping device Ø1400 mm on electro-permanent magnet, radial and axial grinding of rings

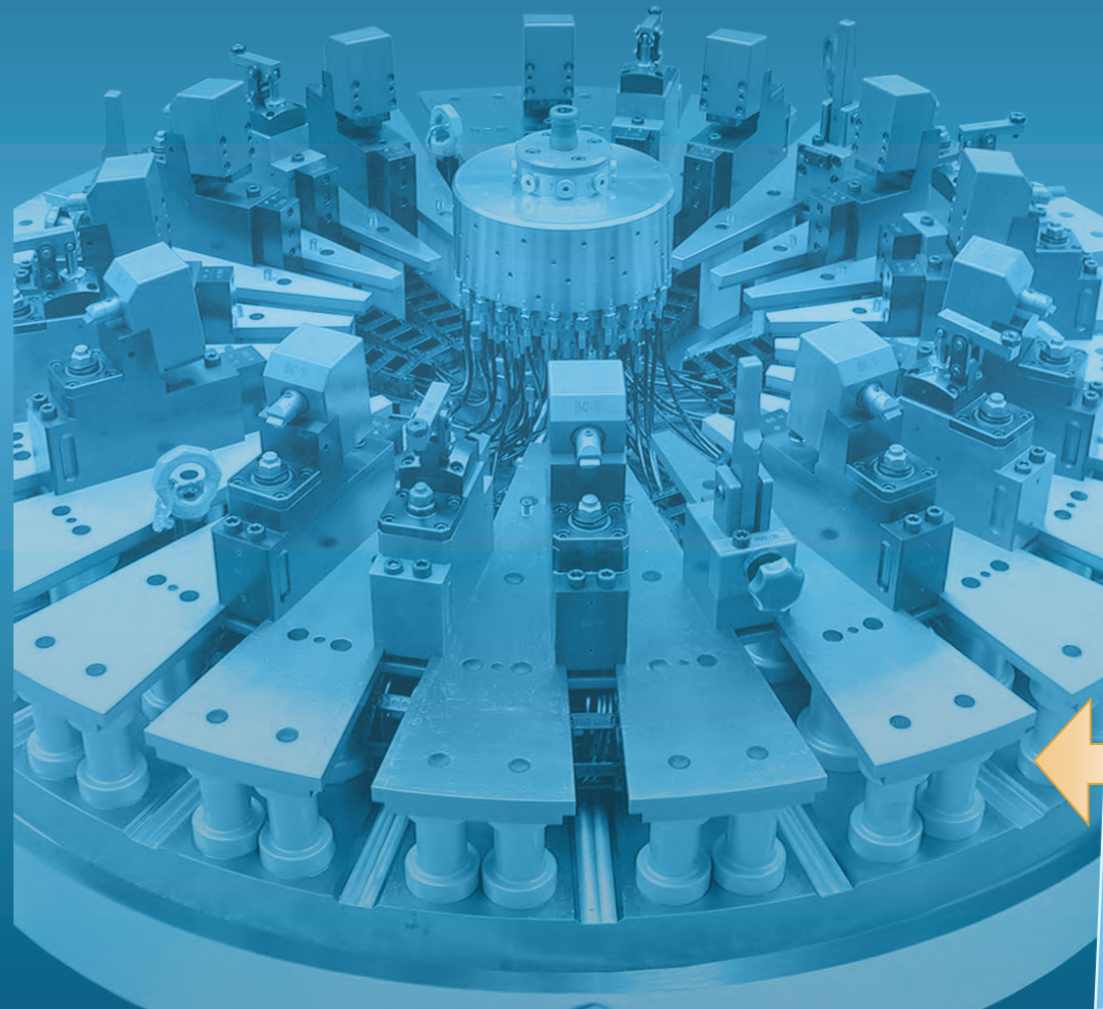






## SAV POLE RAISERS

Pole raisers for turning applications



Fixed pole raisers with positioning collar

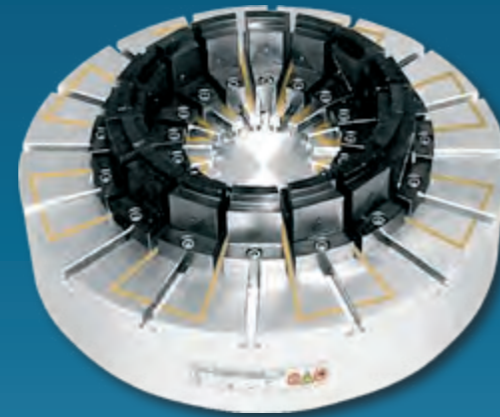


### Application:

Hard turning of thin roller bearing rings on 3 sides with fixed and movable pole raisers

### Execution:

- Pole raisers in segmented execution ensure an undisturbed tool path for 3 side machining of thin rings
- Through the radial adjustment a larger diameter range can be covered
- Cut-outs for uneven workpieces or for through holes possible
- Depending on workpiece stiffness also flexible pole raisers for uneven clamping surfaces
- The pole raisers for circular magnets must be adjusted individually
- We design and produce pole raisers for special solutions on request.

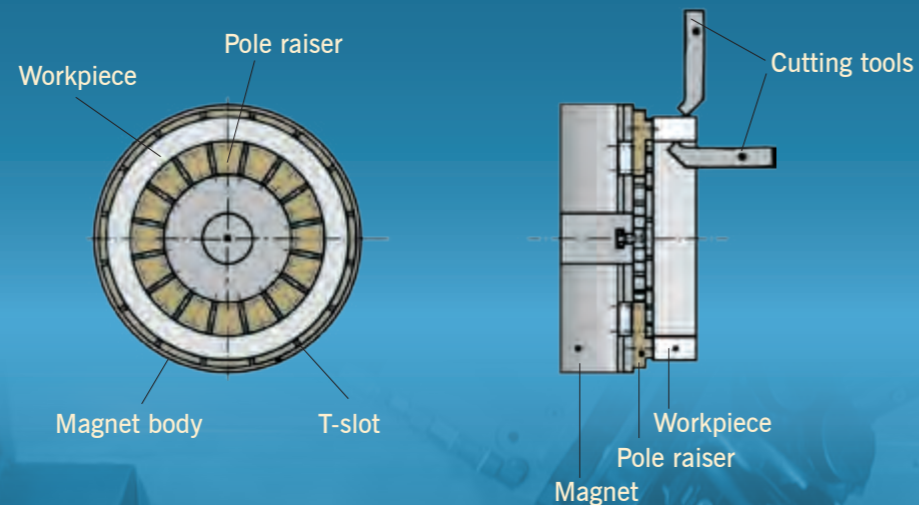

## SAV TOP TOOLING




### ADAPTER POLE PLATES

- No loss of workpiece contact surface
- Good holding forces also with smaller diameters
- Easily changeable
- Good chip removal, easy to clean
- Pre-setting of pole raisers outside the machine
- Pole plate changing can be automated
- Also with T-slots for pole raisers






### POLE BEAMS

- As protection against wearing of magnet top plate
- Easy cleaning
- On request also with T-slots
- Toothed racks for positioning of heavy rings possible

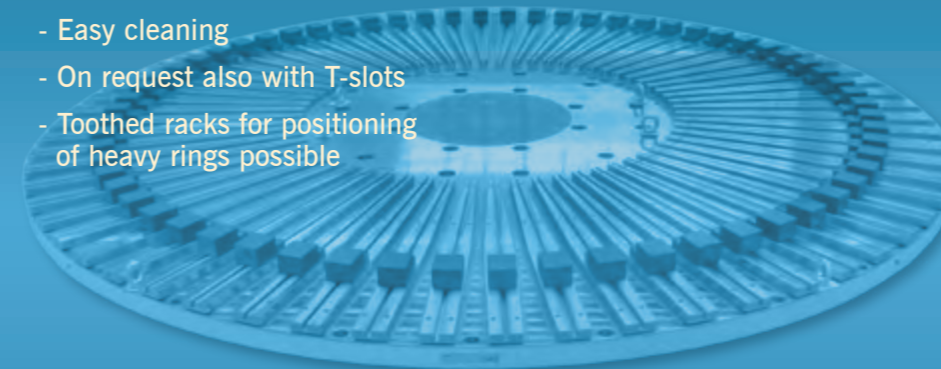

### ADAPTER POLE RINGS

- Upto diameter Ø650 mm
- No loss of workpiece contact surfaces
- Profiling possible
- Good holding forces, also at smaller diameters
- Easily changeable
- Economic

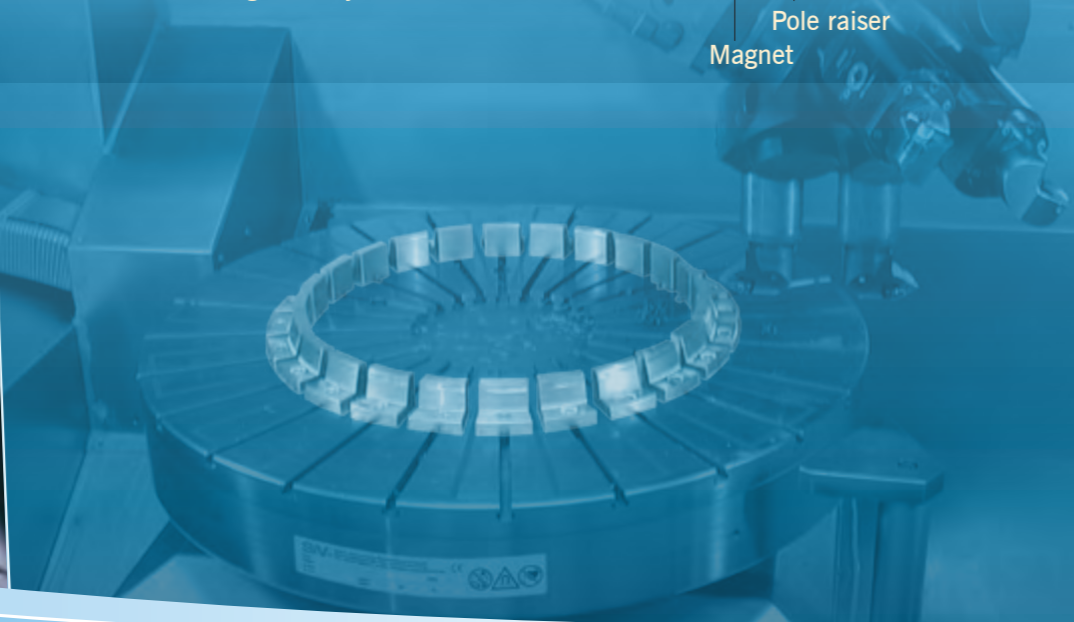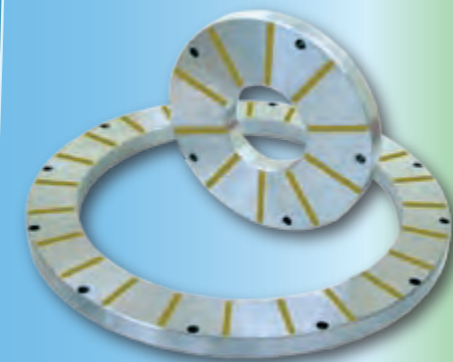




## SAV CONTROL TECHNOLOGY

## SAV 876.12

## ELECTRONIC POLARITY REVERSING CONTROL UNIT

**Compact**  
**User friendly**  
**Reliable**

**Remote control unit**  
**SAV 876.02-SE3**

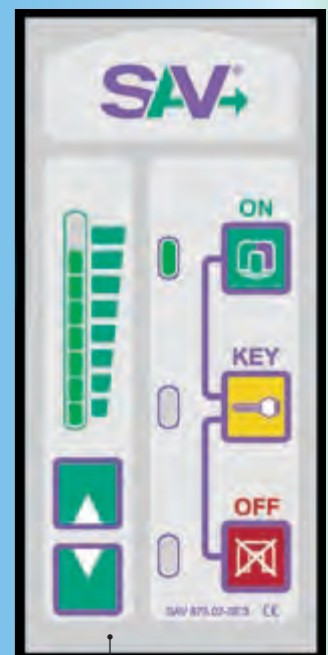

Panel suitable for integration in machine console

### Features:

- small and compact
- easy to integrate in any machine
- operator-friendly through LCD clear text display and foil keys
- reliable and safe

### Use:

For electro-permanent magnetic clamping systems. Also suitable for retrofitting.

Operation through remote control unit or PLC signals.

### Advantages:

- Short circuit proof
- Fully electronic
- Extended diagnostics
- Monitoring of short circuit to ground
- Very compact design
- Pre-programmed settings
- Individual programmability
- Automatic mains-frequency recognition
- Functional design and operation guide

### SAV 876.12 for electro-permanent magnets

Ordering no.	Dimensions in mm			Weight in kg	Magnet voltage DC in V	Magnet current in A	Mains voltage AC in V
	Length	Width	Depth				
876.12-E-O-210/30/230	220	120	95	2	210	30	230
876.12-E-O-210/30/400	260	120	95	3	210	30	400
876.12-E-O-360/30/400	320	120	95	3	360	30	400
876.12-E-O-360/60/400	400	120	95	5	360	60	400
876.12-E-O-360/60x2/400	540	120	95	6	360	60x2	400

On request also available in separate box (876.12-S-O-...)


### SAV 876.10 for electro magnets

876.10-E-T-24/ 7 /230	220	120	95	2	24	7	230
876.10-E-T-24/15/230	260	120	95	3	24	15	230
876.10-E-O-110/ 6 /230	220	120	95	2	110	6	230
876.10-E-O-110/16/230	260	120	95	3	110	16	230

**CE-conformity according Machine, Low-Voltage and EMC Directives.**



Control unit SAV 876.10

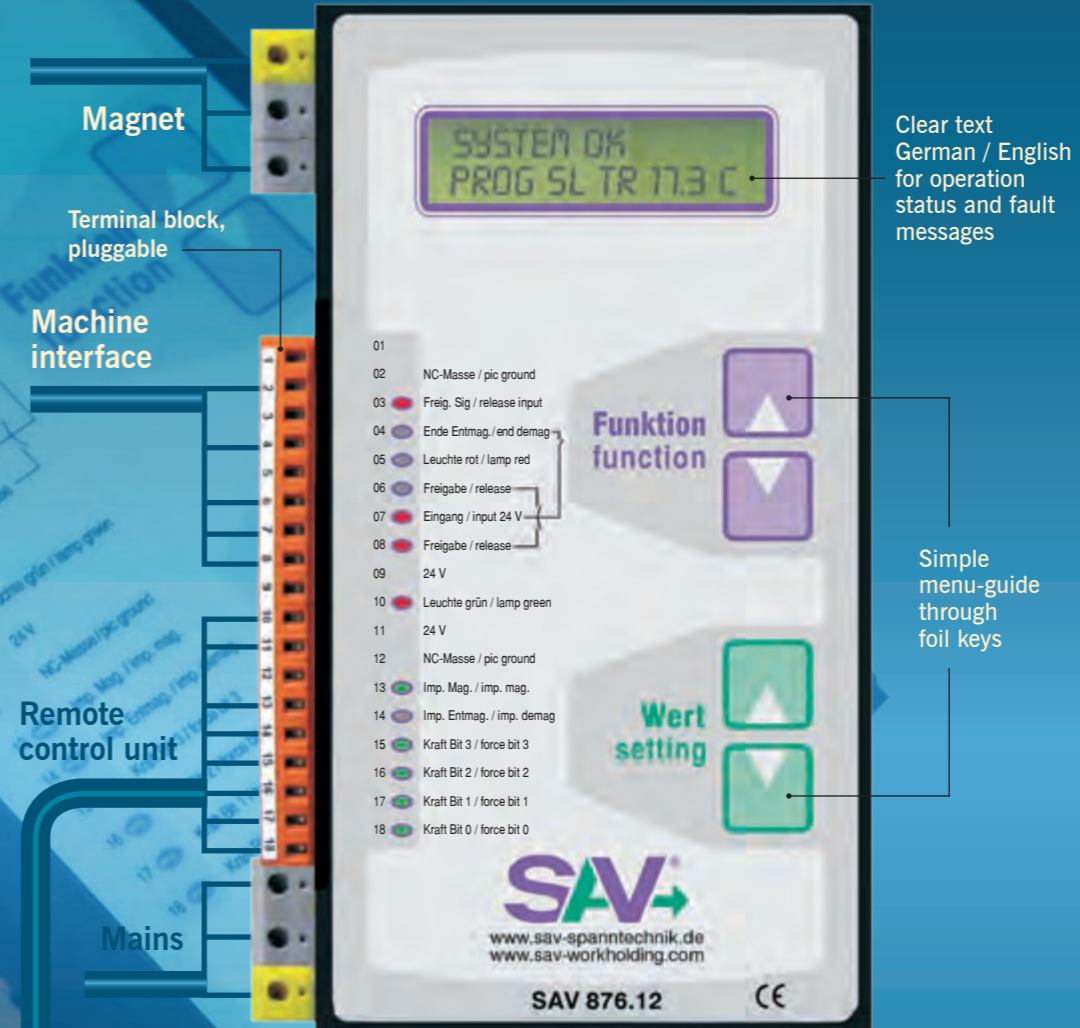

Magnet

Terminal block, pluggable

Machine interface

Remote control unit

Mains

Clear text German / English for operation status and fault messages

Simple menu-guide through foil keys

- 01
- 02 NC-Masse / pic ground
- 03 Freig. Sig / release input
- 04 Ende Entmag. / end demag
- 05 Leuchte rot / lamp red
- 06 Freigabe / release
- 07 Eingang / input 24 V
- 08 Freigabe / release
- 09 24 V
- 10 Leuchte grün / lamp green
- 11 24 V
- 12 NC-Masse / pic ground
- 13 Imp. Mag. / imp. mag.
- 14 Imp. Entmag. / imp. demag
- 15 Kraft Bit 3 / force bit 3
- 16 Kraft Bit 2 / force bit 2
- 17 Kraft Bit 1 / force bit 1
- 18 Kraft Bit 0 / force bit 0

Funktion function

Wert setting

SAV  
www.sav-spanntechnik.de  
www.sav-workholding.com

SAV 876.12

CE



## SAV ELECTRIC SUPPLY FOR CIRCULAR MAGNETS

### Separated slip ring body SAV 248.81 power supply for electro circular magnets

Dimensions in mm		Magnet voltage in V	Number of contacts	Max r.p.m.	Weight in kg
Diameter	Length				
bis 300	40	24	2	3600	1.1
bis 900	61.5	110	3	3200	2.0
bis 1600	84.0	110	3	2500	3.5




### Separated slip ring body SAV 248.85 power supply for electro-permanent circular magnets

Dimensions in mm		Magnet voltage in V	Number of contacts	Max r.p.m.	Weight in kg
Diameter	Length				
bis 800	61.5	210/360	3	4100	1.1
bis 1000	65.5	360	3	3000	2.5
bis 1600	79.0	360	4	3000	3.0

### Power supply for large circular magnets

With integrated flat slip ring body for large magnets on vertical spindle machines

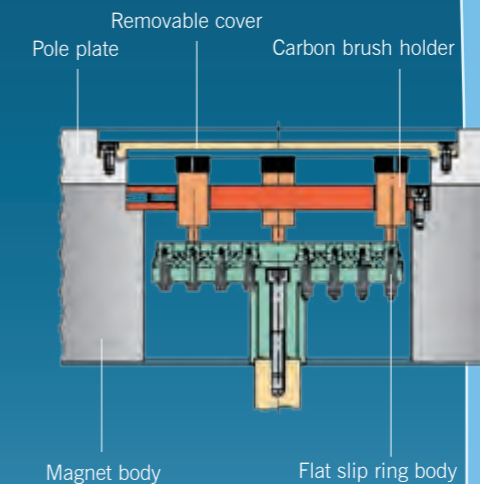

**Application:**  
For circular magnets with diameter bigger than Ø1000 mm.

**Execution:**  
Completely integrated in the magnet.  
Adaption to spindle on request.

**Application:**

Slip ring bodies are used in combination with carbon brush holders for power supply.  
For separate mounting to the hollow machine spindle.  
Suitable protection must be provided to prevent contact with live components.

**Execution:**

The slip ring body is supplied with a small through-hole only. This can be machined (for instance with thread) on request to suit the machine spindle.

### Carbon brush holder SAV 248.83 power supply for electro circular magnets

Dimensions in mm			Magnet voltage in V	Number of contacts	Weight in kg
Diameter	Length	Width			
bis 300	140	40	24	2	0.10
bis 900	140	40	110	3	0.17
bis 1600	140	60	110	3	0.20



### Electro-permanent circular chuck

- for combined circular grinding / turning machine
- changeable magnet / 3-jaw chuck
- combined drawing bar / power supply and internal coolant supply



### Electro-permanent circular magnet

changeable at spindle, for hard turning operation and extreme rotation speeds upto 3000 r.p.m.  
Electric connection through spring loaded contacts.

**Application:**

For power supply on the slip ring body. The carbon brush holders are supplied in 3 sizes including mounting bar.

**Execution:**

Carbon brushes, spring loaded.  
Mounting over spacer bolts

### Carbon brush holder SAV 248.84 power supply for electro-permanent circular magnets

Dimensions in mm			Magnet voltage in V	Number of contacts	Weight in kg
Diameter	Length	Width			
bis 800	140	40	210/360	3	0.10
bis 1000	140	40	360	3	0.17
bis 1600	140	60	360	4	0.23



Bayonet quick lock

### Power supply for electro-permanent circular magnets

With industrial watertight connector; for magnetizing and demagnetizing, removed during machining (only for electro-permanent magnets)



Contact flange

Spring loaded contacts with coolant supply



**Application:**

- Protection IP65
- with quick locking for simple handling






### SAV PERMANENT CIRCULAR MAGNETS

SAV 244.02

With parallel pole arrangement, enhanced magnetic system

**Application:**

Sizes A = 100 to 160 mm for grinding  
 Sizes A = 200 to 500 mm for turning and grinding

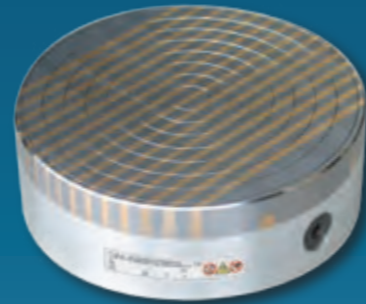

Dimensions in mm		Pole pitch steel/brass	Switching positions	Weight in kg
Diameter	Height $^{+0.5}_{-2}$			
100	62	4/1.5 2/1.5	1	3
130	62	4/1.5 2/1.5	1	5
160	75	6/5	1	8
200	80	8/5	1	13
250	80	8/5	1	20
300	85	8/5	1	29
350	85	8/5	1	40
400	100	8/5	1	59
450	100	8/5	2	70
500	100	8/5	2	90

Magnetic field height : 10 mm

Pole plate wearing limit : 8 mm


### SAV PERMANENT CIRCULAR MAGNETS

SAV 244.06

With radial poles

**Application:**

For cylindrical and ring shaped workpieces, for grinding and hard turning.

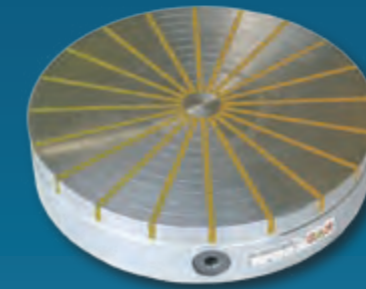

Pole plate wearing limit:

- 5 mm for A = 100 to 300 mm
- 10 mm for A = 350 to 400 mm

Dimensions in mm		Non-magnetic center in mm	Number of poles	Weight in kg
Diameter	Height $^{+0.5}_{-2}$			
100	48	14	6	3
130	57	16	10	6
150	57	20	10	8
200	57	28	12	14
250	70	30	16	27
300	73	40	16	41
350	73	40	20	55
400	75	40	20	75



**Execution:**

- High magnetic force
- Concentric grooves simplify centering of the workpiece
- Standard execution without center through hole. Possible on request.
- Bigger diameters available with T-slots
- Also available with flange on request

**Nominal holding force:**

- 100 N/cm<sup>2</sup>




### SAV LAMINATED TOP PLATES

SAV 248.01

For use on circular magnets with parallel pole arrangement

**Application:**

For clamping of profiled workpieces on magnets with parallel pole arrangement.

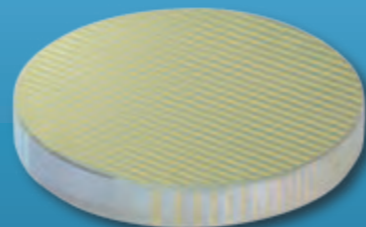

Pole pitch: Steel 3 mm  
 Brass 1 mm  
 Machining depth: 8 mm

Dimensions in mm			Dimensions in mm		
Diameter	Height $^{+0.5}_{-2}$	Weight in kg	Diameter	Height $^{+0.5}_{-2}$	Weight in kg
155	25	4	350*	25	19
200	25	6	400*	30	30
250	25	10	450*	30	38
300	25	14	500*	30	47

\*available on request

### SAV LAMINATED TOP PLATES

SAV 248.05

With radial poles

**Application:**

For use on circular magnet SAV 244.06 with radial poles.



Dimensions in mm		Number of poles	Weight in kg
Diameter	Height $^{+0.5}_{-2}$		
150	20	10	3
200	20	12	5
250	20	16	8
300	25	16	14
350	25	20	19
400	25	20	24.5

**Execution:**

- For clamping of profiled workpieces
- Mounting on magnetic chuck to be agreed upon
- Profile depth: max. 8 mm.

**Execution:**

- Exceptional strong magnetic field
- Concentric grooves simplify centering of the workpiece
- Also available with flange

**Nominal holding force:**

- 70 N/cm<sup>2</sup> for diameter Ø100 – 160 mm
- 140 N/cm<sup>2</sup> for diameter Ø200 – 500 mm

**Execution:**

- Can be machined to any required shape, or custom machined during manufacture
- Mounting on magnetic chuck to be agreed upon
- Lamination must be parallel to magnetic chuck





## SAV NEODYMIUM CIRCULAR MAGNETS

SAV 244.07


## SAV FLANGES

With parallel pole arrangement  $P = 6$  mm,  
Neodymium magnets with extreme high holding force


### Application:

For workpieces that are particularly difficult to clamp, such as **ferrotic** and **hard metals** with cobalt content.

For very small and smallest workpieces.

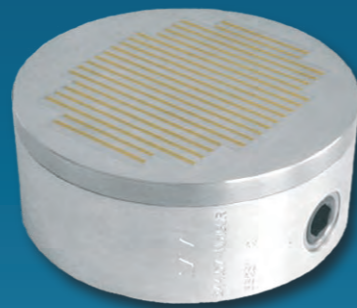

Pole configuration



Diameter	Height $^{+0.5}_{-2}$	Dimensions in mm						Weight in kg
		G	H	I	J	K	L	
100	65	-	-	48	-	-	74	2
125	65	-	88	54	-	98	67	3
160	65	-	104	54	-	134	61	4.5
180	65	124	84	64	134	97	61	6.5
200	65	134	104	74	158	110	73	8.5


**Strongest forces for smallest parts !**

### Execution:


- Housing from aluminum, pole plate made from stainless steel.
- Extreme high holding force through a specially developed construction using Neodymium-Iron-Boron magnets.
- Also available with flange on request
- Magnetic field height : 4 mm
- Pole plate wearing limit : 3 mm

### Nominal holding force:

180 N/cm<sup>2</sup> on inducible steel surface

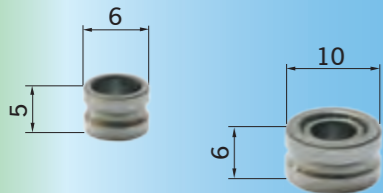


Also suitable for parts with 0.8 mm thickness

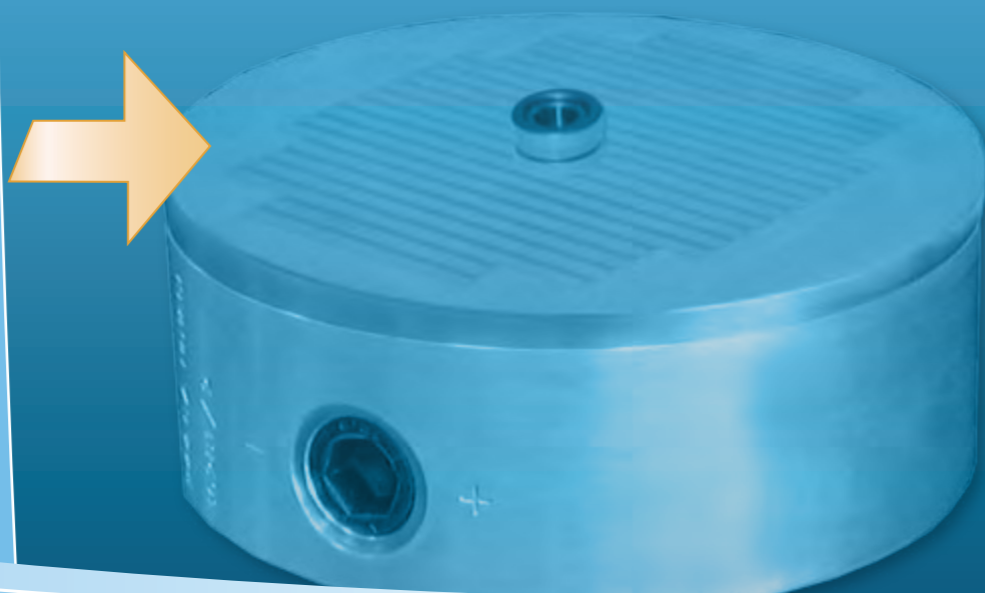

### Short taper adapter flanges without mounting bolts

SAV 248.90




### Application:

Mounting of circular magnets or other clamping tools. For spindle noses according DIN 55026 (55021) Form A and B, ISO 702/I A1 and A2, ASA B5.9 A1 and A2.

### Short taper adapter flanges with bayonet ring fixing with studs and collar nuts

SAV 248.91




### Application:

Mounting of circular magnets or other clamping tools. For spindle noses according DIN 55022 and ISO 702/III.

### Short taper adapter flanges with camlock fixing

SAV 248.92




### Application:

Mounting of circular magnets or other clamping tools. For spindle noses according DIN 55029 and ISO 702/II, ASA b5.9 D1.

### Morse taper adapter

SAV 248.94



### Application:

Mounting of circular magnets or other clamping tools. For morse taper sockets according DIN 228.

Pulling thread possible according requirements.

### Execution:

Soft steel flanges according:

- DIN,
- ISO and
- ASA standard

Machined on spindle side. The adaption to magnet or chuck according requirements (please indicate diameter and hole pattern when ordering)

We supply our circular magnets completely mounted to flanges on request.







## SAV HYDRAULIC-MECHANIC CLAMPING SYSTEMS

### Column chuck

- Ø165 upto Ø400 mm
- for heavy chip removal



### 2+2 jaw chucks

- Ø165 upto Ø500 mm
- 2x centric operation
- axial pressing and radial positioning device



### Rotary finger chuck

- ø 165 upto 400 mm
- Precise centering in tooth system
- Supporting and clamping in bore with miniature clamping fingers for highest precision



### Face clamping finger chuck

- Ø165 upto Ø500 mm
- radial relocation
- integrated supporting elements for damping




### Centering and face clamping chuck

- Ø165 upto Ø500 mm
- for fine turning applications



### 6 jaw lever compensating chuck


- Ø200 upto Ø1480 mm
- for clamping of rings without deformation
- base jaw sealed
- pendular compensation can be blocked

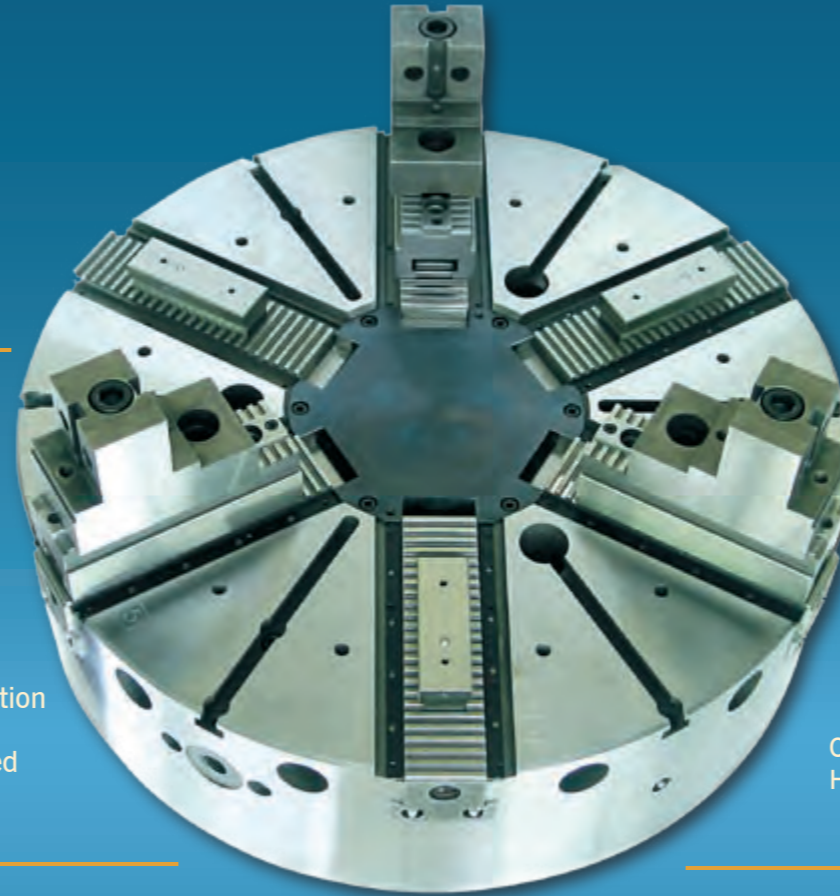

OTHER DIAMETERS FOR HYDRAULIC-MECHANIC CHUCKS ON REQUEST

### Face plate

- Ø500 – Ø2000 mm
- with torque amplifier

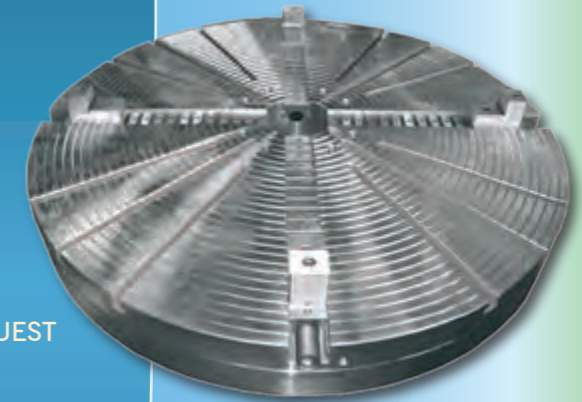


### Compensating chucks

- Ø165 upto Ø400 mm
- 2 jaws with spring loaded centering pin for clamping with offset



### Special clamping fixture

- in special execution for face machining

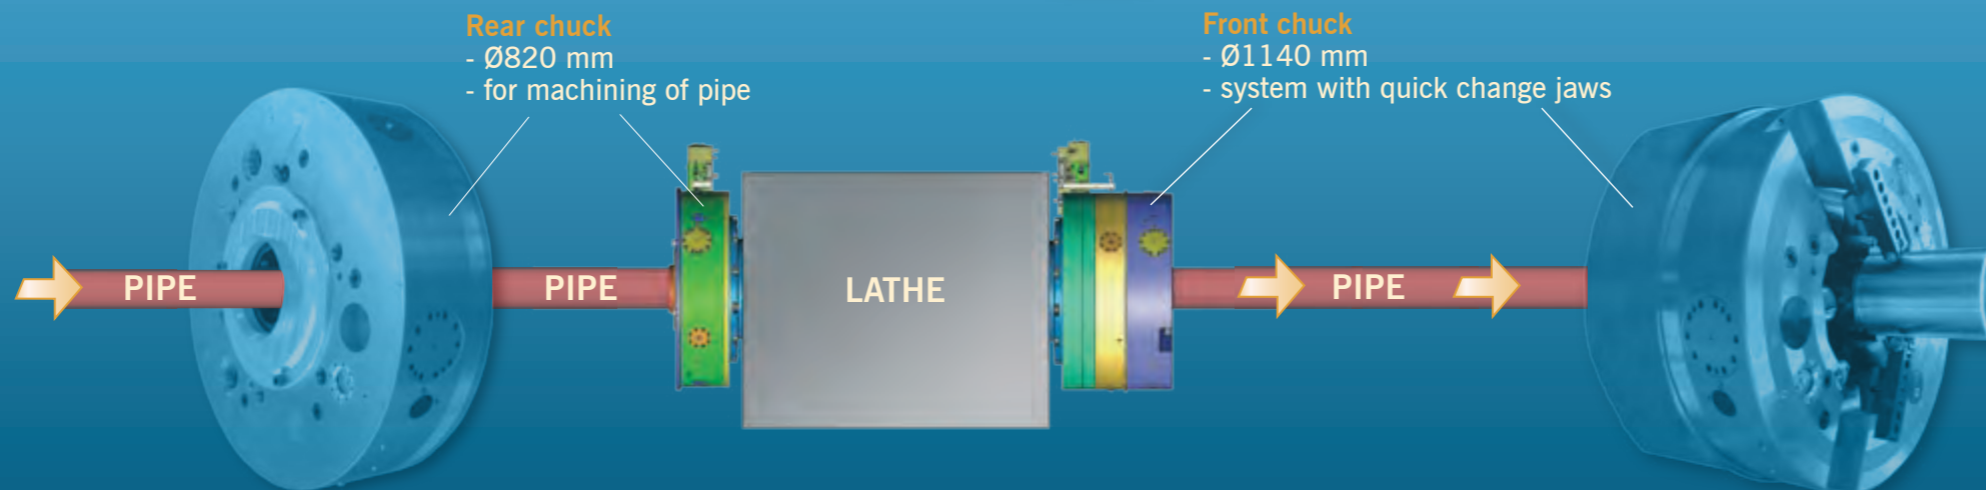

**Rear chuck**  
- Ø820 mm  
- for machining of pipe

**Front chuck**  
- Ø1140 mm  
- system with quick change jaws




# WORKHOLDING

## Contents

	Page
SAV Magnetic Workholding Technology – With 25 Years Competence	02 – 03
SAV Production Technology , Advantages, References	04 – 05
SAV Clamping Technologies	06 – 07
SAV Magnetic Workholding – Selection Criteria	08 – 09
SAV Electro-Permanent Circular Magnets	10 – 13
SAV Electro Magnets	14 – 16
SAV Sliding Shoe Magnets	17
SAV Special Magnetic Solutions	18
SAV Large Magnet Production	19
SAV Mechatronic Chuck	20
SAV Special Combination Chucks	21
SAV Pole Raisers / Top Tooling	22 – 23
SAV Control Technology	24 – 25
SAV Electric Supply for Circular Magnets	26 – 27
SAV Permanent Magnetic Chucks	28 – 29
SAV Laminated Adapter Plates	28 – 29
SAV Neodymium Circular Magnets	30
SAV Flanges	31
SAV Hydraulic – Mechanic Clamping Systems	32-33

## TURNING HARD TURNING CIRCULAR GRINDING



### SAV NUREMBERG



#### Germany Headquarters

Sales and marketing – Germany, Austria, Switzerland

#### SAV Spann- Automations- Normteiletechnik GmbH

Schießplatzstraße 36+38a  
D-90469 Nuremberg  
Germany  
Tel.: +49 - 911 - 9483-0  
Fax: +49 - 911 - 4801426  
Email: info@sav-spanntechnik.de



### SAV PRODUCTION



#### SAV Production GmbH Nuremberg-Eibach

Gundelfinger Straße 8  
D-90469 Nuremberg-Eibach  
Germany



#### SAV Mittweida GmbH

Leipziger Straße 29-31  
D-09648 Mittweida  
Germany

#### F&K Prototyping and Erosion Technology

Leipziger Straße 31  
D-09648 Mittweida  
Germany

#### PARTEC Automation Technology and Handling Systems

Leipziger Straße 29  
D-09648 Mittweida  
Germany

#### EMATECH GmbH

Electronic and magnetic technology  
Luitpoldstraße 32  
D-87700 Memmingen  
Germany



### SAV INTERNATIONAL BRANCH OFFICES

#### Czech Republic Sales and Marketing – Central and Eastern Europe



#### SAV CZECH spol. s. r. o.

Kotojedy 56  
CZ-767 01 Kroměříž  
Czech Republic  
Tel.: +420 - 573 - 334 062

#### Poland Sales and Marketing – Poland



#### SAV POLSKA sp. z o.o.

ul. Hetmańska 38  
PL-85-039 Bydgoszcz  
Poland  
Tel.: +48 - 52 321 91 40

#### The Netherlands Sales and Marketing – International SAV Workholding and Automation

Steenenstraat 8  
NL-3262 JM Oud-Beijerland  
The Netherlands  
Tel.: +31 - 186 - 626 469



#### North-America Sales and Marketing – North America

SAV-North America Inc.  
250 Nutmeg Road South, STE N  
South Windsor, CT 06074, U.S.A.  
Tel.: +1 - 860 - 882 - 0841



#### China Sales and Marketing – Asia

SAV-Asia (in progress)  
Hong Kong / Guangzhou







WORKHOLDING AND AUTOMATION



**DESIGN**

**DEVELOPMENT**

**PRODUCTION**

**SALES**

**SERVICE**

**SAV Spann- Automations-  
Normteiletechnik GmbH**

Schießplatzstraße 36+38a  
D-90469 Nuremberg  
Germany

Tel.: +49 - 911 - 9483 - 0

Fax: +49 - 911 - 4801426

Email: [info@sav-workholding.com](mailto:info@sav-workholding.com)

[www.sav-workholding.com](http://www.sav-workholding.com)