




с регулировкой радиального биения инструмента

Форма AD/B


| Номер по каталогу | SK | Диапазон зажимаемых диаметров d, мм | d | A | D | SW | |
|-------------------|-------|-------------------------------------|--------|----|-----|----|---|
| 406.02.16.ARF | BT 40 | ER25 | 2 - 16 | 42 | 90 | 50 | 4 |
| 406.02.20.ARF | BT 40 | ER32 | 2 - 20 | 50 | 100 | 50 | 4 |
| 406.02.26.ARF | BT 40 | ER40 | 3 - 26 | 63 | 105 | 60 | 4 |
| 506.02.20.ARF | BT 50 | ER32 | 2 - 20 | 50 | 110 | 50 | 4 |
| 506.02.26.ARF | BT 50 | ER40 | 3 - 26 | 63 | 115 | 60 | 4 |

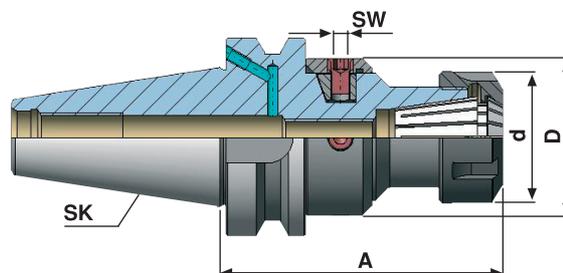

INFO

Технические данные 7.01-7.02

Комплектующие



6.05 - 6.10

Цанги ER



6.32

Ключ ER