




с укороченным конусом Морзе
по ГОСТ 9953-82 (DIN 238)

Номер по каталогу	SK	d	A	L
301.14.12	SK 30	B12	13,5	18,5
301.14.16	SK 30	B16	15,5	24
401.14.12	SK 40	B12	15	18,5
401.14.16	SK 40	B16	17	24
401.14.18	SK 40	B18	17	32
501.14.16	SK 50	B16	20	24
501.14.18	SK 50	B18	20	32

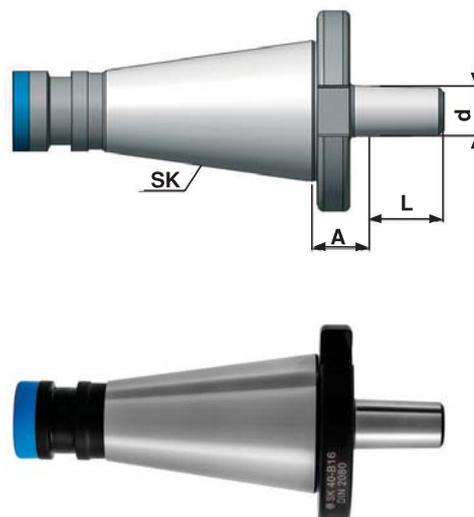

Комплектующие



6.36

Сверлильный патрон