


Концевые фрезы для обработки графита

Тип GF-SBR, GF-SBL, GF-SBX

- 2 зуба, угол спирали 15° для типов GF-SBR и GF-SBL и 30° для GF-SBX

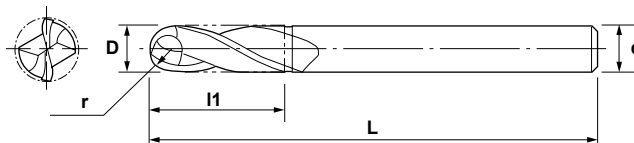

GF-SBR (стандартное исполнение)

Номер по каталогу	Наличие на складе	Размеры, мм				
		D	r	l1	L	d
GF-SBR2020	<input type="checkbox"/>	2.0	1.0	10	80	4
GF-SBR2020S6	<input type="checkbox"/>	2.0	1.0	10	80	6
GF-SBR2030	<input type="checkbox"/>	3.0	1.5	15	80	4
GF-SBR2030S6	<input type="checkbox"/>	3.0	1.5	15	80	6
GF-SBR2040	<input type="checkbox"/>	4.0	2.0	20	80	4
GF-SBR2040S6	<input type="checkbox"/>	4.0	2.0	20	80	6
GF-SBR2050	<input type="checkbox"/>	5.0	2.5	30	100	6
GF-SBR2060	<input type="checkbox"/>	6.0	3.0	30	100	6
GF-SBR2070	<input type="checkbox"/>	7.0	3.5	30	100	6
GF-SBR2080	<input type="checkbox"/>	8.0	4.0	40	110	8
GF-SBR2090	<input type="checkbox"/>	9.0	4.5	40	110	8
GF-SBR2100	<input type="checkbox"/>	10.0	5.0	50	120	10
GF-SBR2110	<input type="checkbox"/>	11.0	5.5	50	120	10
GF-SBR2120	<input type="checkbox"/>	12.0	6.0	55	130	12

О наличии и сроках поставки узнавайте дополнительно.

GF-SBL (длинное исполнение)

Номер по каталогу	Наличие на складе	Размеры, мм				
		D	r	l1	L	d
GF-SBL2020	<input type="checkbox"/>	2.0	1.0	10	100	4
GF-SBL2020S6	<input type="checkbox"/>	2.0	1.0	10	100	6
GF-SBL2030	<input type="checkbox"/>	3.0	1.5	15	100	4
GF-SBL2030S6	<input type="checkbox"/>	3.0	1.5	15	100	6
GF-SBL2040	<input type="checkbox"/>	4.0	2.0	20	100	4
GF-SBL2040S6	<input type="checkbox"/>	4.0	2.0	20	100	6
GF-SBL2050	<input type="checkbox"/>	5.0	2.5	30	120	6
GF-SBL2060	<input type="checkbox"/>	6.0	3.0	30	150	6
GF-SBL2080	<input type="checkbox"/>	8.0	4.0	40	150	8
GF-SBL2100	<input type="checkbox"/>	10.0	5.0	50	180	10
GF-SBL2120	<input type="checkbox"/>	12.0	6.0	55	200	12

GF-SBX (сверхдлинное исполнение)

Номер по каталогу	Наличие на складе	Размеры, мм				
		D	r	l1	L	d
GF-SBX2020	<input type="checkbox"/>	2.0	1.0	20	100	6
GF-SBX2030	<input type="checkbox"/>	3.0	1.5	30	100	6
GF-SBX2040	<input type="checkbox"/>	4.0	2.0	60	110	6
GF-SBX2050	<input type="checkbox"/>	5.0	2.5	70	125	6
GF-SBX2060	<input type="checkbox"/>	6.0	3.0	80	130	6
GF-SBX2080	<input type="checkbox"/>	8.0	4.0	100	150	8
GF-SBX2100	<input type="checkbox"/>	10.0	5.0	120	170	10
GF-SBX2120	<input type="checkbox"/>	12.0	6.0	130	190	12

Рекомендации по выбору режимов резания для GF-SBR, GF-SBL и GF-SBX

Материал	Графит	
Вид обработки		
Диаметр	n (мин ⁻¹)	Vf (мм/мин)
2	40,000	800
3	27,000	900
4	20,000	1,000
5	16,000	1,100
6	13,300	1,200
8	10,000	1,800
10	8,000	2,000
12	6,500	2,000