




6series

- *ISO metric thread*
- *General pitch thread*
- *Whitworth thread*
- *Unified thread*
- *British standard pipe thread*
- *American standard pipe thread*

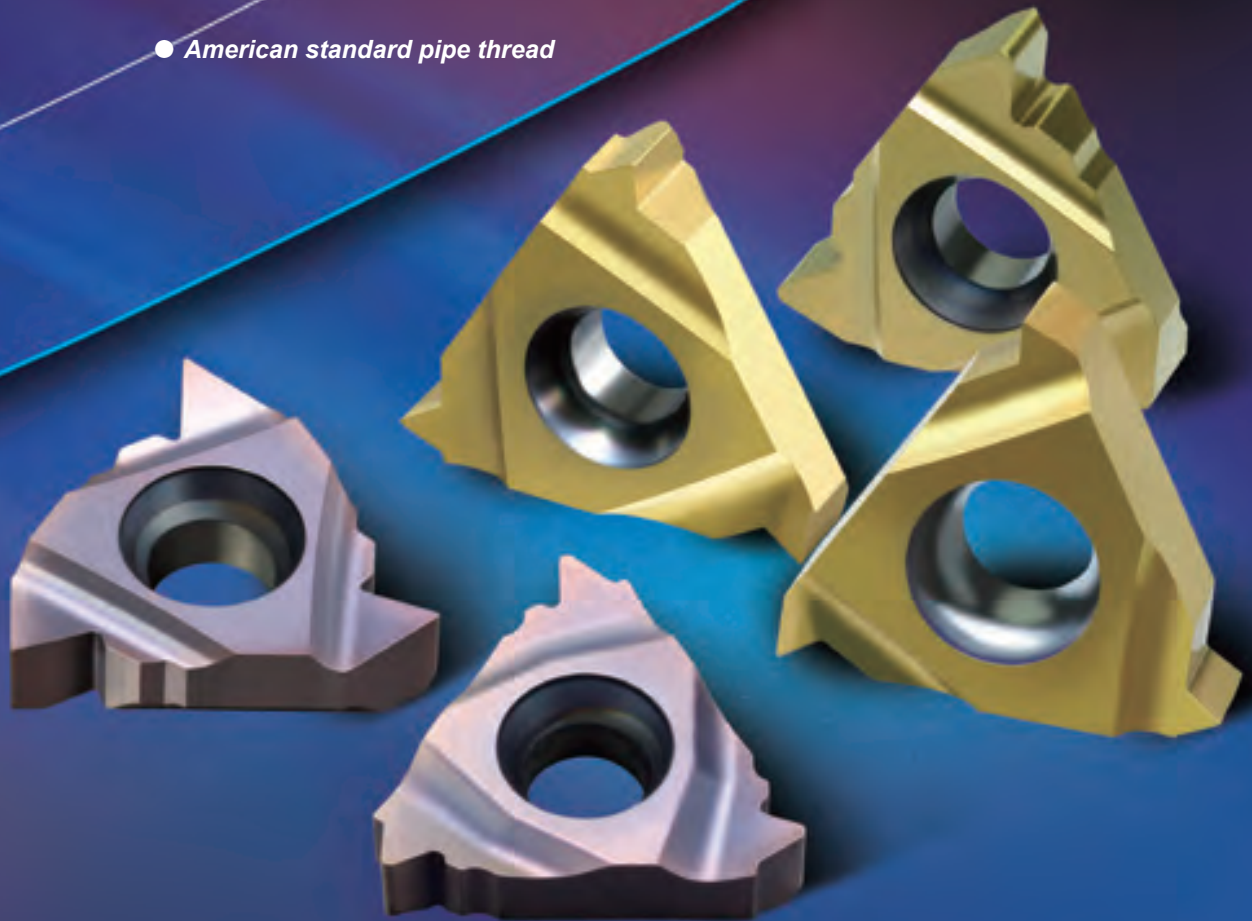

Threading insert

Fully ground high precision inserts for high quality, high precision threading in a variety of materials e.g. steel, stainless steel, hard-to-machine materials.

How to select threading tools

How to select threading tools

Structure of threading tools selected table

- Categorized as external threading and internal threading according to machining type.
- Separately listed out according to series.

Dimensions of product

Indicating external threading or internal threading

External threading tools

R-type shown

Threading insert type Including type, standard, tolerance class

Diagram of thread pitch

ISO metric thread (with end)

ISO 965-1980 DIN 13
GB/T 197-2003 Tolerance class: 6g/6H

R type L type

Product specification Including type (right hand and left hand), basic dimensions, applicable inserts, spare parts

Product specification Including type (right hand and left hand), basic dimensions, stock


Dimension diagram of insert

Type	Stock	Basic dimensions(mm)					Applicable inserts	Inserts screw	Shim	Shim screw	Wrench	
		a	h	b	L	s						
ZSER	1616H16	▲	16	16	16	100	20	Z16ERC□□□□	80 M3.5X12T	MT16-□□MN	SM4X8C	WT15P
	2020K16	▲	20	20	20	125	25					
	2525M16	▲	25	25	25	150	32					
	3225P16	▲	32	32	25	170	32					
	3232P16	▲	32	32	32	170	40					
	4040S22	△	40	40	40	250	50					
ZSEL	1616H16	▲	16	16	16	100	20	Z16EL□□□□	80 M3.5X12T	MT16-□□MN	SM4X8C	WT15P
	2020K16	▲	20	20	20	125	25					
	2525M16	▲	25	25	25	150	32					
	3225P16	▲	32	32	25	170	32					
	3232P16	▲	32	32	32	170	40					
	4040S22	△	40	40	40	250	50					

▲ Stock available △ Make-to-order

Type	Basic dimensions(mm)					Recommended coating grade	
	Pitch	S	ØLC	ed		YBG203	YBG205
The right hand tools	The left hand tools						
Z16ER0.SISO	Z16EL0.SISO	0.50	3.52	9.525	4.0	★	○
Z16ER0.75ISO	Z16EL0.75ISO	0.75	3.52	9.525	4.0	★	○
Z16ER1.0ISO	Z16EL1.0ISO	1.00	3.52	9.525	4.0	★	○
Z16ER1.25ISO	Z16EL1.25ISO	1.25	3.52	9.525	4.0	★	○
Z16ER1.5ISO	Z16EL1.5ISO	1.50	3.52	9.525	4.0	★	○
Z16ER1.75ISO	Z16EL1.75ISO	1.75	3.52	9.525	4.0	★	○
Z16ER2.0ISO	Z16EL2.0ISO	2.00	3.52	9.525	4.0	★	○
Z16ER2.5ISO	Z16EL2.5ISO	2.50	3.52	9.525	4.0	★	○
Z16ER3.0ISO	Z16EL3.0ISO	3.00	3.52	9.525	4.0	★	○
Z22ER3.SISO	Z22EL3.SISO	3.50	4.65	12.7	5.0	★	○
Z22ER4.SISO	Z22EL4.SISO	4.00	4.65	12.7	5.0	★	○
Z22ER4.5ISO	Z22EL4.5ISO	4.50	4.65	12.7	5.0	★	○
Z22ER5.0ISO	Z22EL5.0ISO	5.00	4.65	12.7	5.0	★	○
Z22ER5.5ISO	Z22EL5.5ISO	5.50	4.65	12.7	5.0	★	○
Z22ER6.0ISO	Z22EL6.0ISO	6.00	4.65	12.7	5.0	★	○


★ Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order

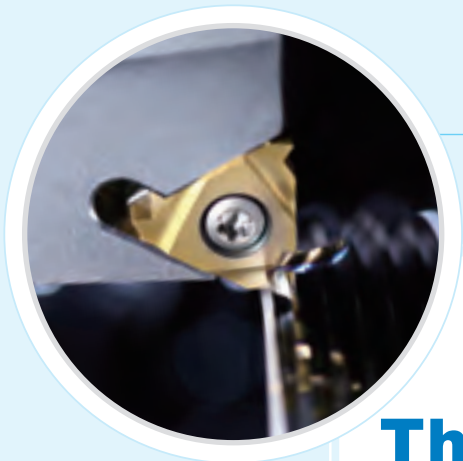

TURNING



Threading Tools

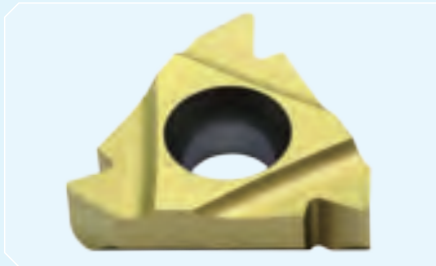

Threading tools overview	•	A294-A295
Introduction on threading insert grade and chipbreaker	•	A296
Threading insert	•	A297-A304
Thin Threading insert code key		A297
Thin ISO metric external thread		A298-A299
Thin General pitch thread		A300
Thin Whitworth thread		A301
Thin Unified thread		A302
Thin British standard pipe thread		A303
Thin American standard pipe thread		A304
Thin threading insert code key		A305
Thin ISO metric external thread		A306
Thin general pitch thread		A307
Thin Whitworth thread		A308
Thin unified thread		A309
Thin British standard pipe thread		A310
Thin American standard pipe thread		A311
Threading tools	•	A312-A314
Threading tools code key		A312
External threading tools		A313
Internal threading tools		A314
Application information on threading	•	A315-A325

TURNING Threading Tools

Threading tools overview

General turning
Parting and grooving
Threading

Threading tools overview

Applications		For general use			
Legend					
Thread name		ISO metric thread With end	General pitch thread Without end	General pitch thread Without end	
Profil		GM	60	55	
Shape of insert (length: 11, 16, 22mm)		R style shown A298-299	R style shown A300	R style shown A300	
Tool holder	Pitch	Dimensions (mm) (H×W×L) (Dia×L×Min. dia)	Pitch/mm	Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)
	External thread R-type shown A313	16×16×100 20×20×125 25×25×150 32×25×170 32×32×170 40×40×250	0.5~6.0	0.5~5.0 (5~48)	0.5~5.0 (5~48)
Internal thread R-type shown A314	16×125×12 16×150×16 16×150×20 20×150×25 20×180×25 25×150×32 32×200×40 32×250×40 40×300×50 50×350×63	0.5~6.0	0.5~5.0 (5~48)	0.5~5.0 (5~48)	



For general use	For aerospace industry	Heater, gas and water pipe thread	For gas and water faucet and pipe connection
Whitworth thread	Unified thread (American standard threads)	British standard taper pipe threads	American standard taper pipe threads
W	UN	BSPT	NPT
R style shown	R style shown	R style shown	R style shown
<p>A301</p>	<p>A302</p>	<p>A303</p>	<p>A304</p>
Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)
8~19	8~24	11~28	8~27
8~19	8~24	11~28	8~27

General turning

Parting and grooving


Threading

Threading tools overview


suitable for threading in a variety of materials

New nano coating grade YBG203

- Specially treated edge for superior surface quality
- Sharp nose with small cutting resistance and superior performance
- Full ground inserts with high dimensional precision for high quality threading

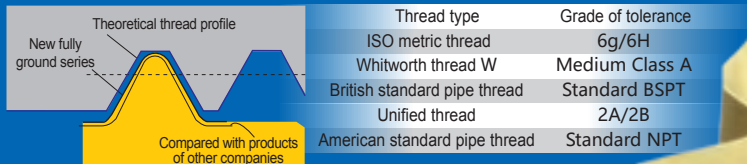


- New nano coating grade specially designed for threading with longer insert life

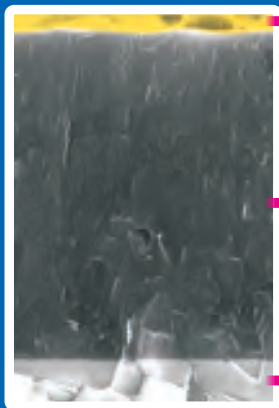

Advanced surface treatment techniques effectively reduce friction and allows for better wear observation.

Advanced TiAlN substrate nano coating, in combination with proper coating ingredients, improves the mechanical and thermal properties of coating.

Further optimizing coating structure, improving coating stress, enhancing bond strength of coating and substrate.

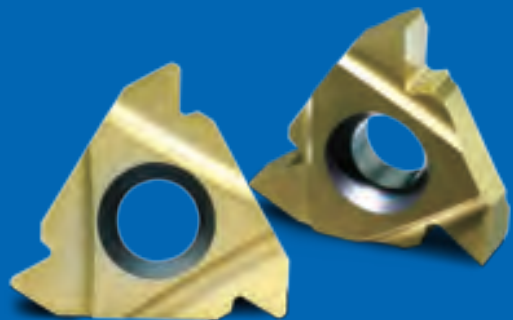

A 296




Case:

Workpiece material: 42CrMo(HB260)

Insert: Z16ER2.0ISO/YBG203

Thread pitch: p=2.0mm

Cutting data: Vc=120 m/min

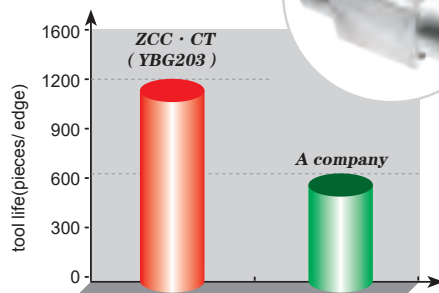

84% tool life improvement of ZCC·CT product than that of company A under the same cutting condition.



Threading inserts code key

General turning
Parting and grooving
Threading
Threading insert

Insert size	
Code	Diameter of IC(mm)
Z11	ø6.35
Z16	ø9.525
Z22	ø12.7

Cutting style	
E	-External threading inserts
I	-Internal threading inserts

Cutting direction	
R	-Right
L	-Left

Z16 E R 2.0 ISO (PP)

Screw pitch		
Full profile (Range of screw pitch is indicated by numbers).		
mm	TPI	
0.5-6.0	48-5	
V profile (Range of screw pitch is indicated by letters).		
	mm	TPI
A	0.5-1.5	48-16
AG	0.5-3.0	48-8
G	1.75-3.0	14-8
N	3.5-5.0	7-5
Thread specification	Range of thread pitch	
ISO metric thread	0.5-6.0	
General pitch thread	0.5-5.0	
Whitworth thread W	8-19	
British standard pipe thread	11-28	
Unified thread	8-24	
American standard pipe thread	8-27	

Profile	
ISO	—ISO metric 60° thread
60	—60° general pitch thread
55	—55° general pitch thread
W	—Whitworth thread
UN	—Unified thread(American standard threads)
BSPT	—British standard taper pipe thread
NPT	—American standard taper pipe thread



Chip breaker	
□	—fully ground edge insert
PP	—3-Dimensional chip-breaking insert

A TURNING Threading Tools


Threading insert

ISO metric thread (with end)

ISO 965-1980 DIN 13
GB/T 197-2003 Tolerance class: 6g/6H

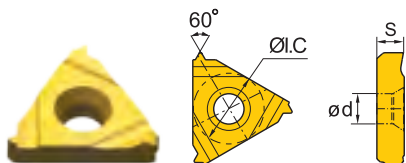

R type

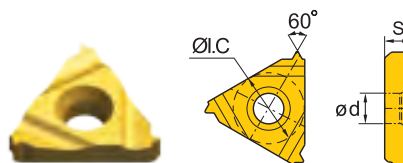


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER0.5ISO	Z16EL0.5ISO	0.50	3.52	9.525	4.0	★	○
	Z16ER0.75ISO	Z16EL0.75ISO	0.75	3.52	9.525	4.0	★	○
	Z16ER1.0ISO	Z16EL1.0ISO	1.00	3.52	9.525	4.0	★	○
	Z16ER1.25ISO	Z16EL1.25ISO	1.25	3.52	9.525	4.0	★	○
	Z16ER1.5ISO	Z16EL1.5ISO	1.50	3.52	9.525	4.0	★	○
	Z16ER1.75ISO	Z16EL1.75ISO	1.75	3.52	9.525	4.0	★	○
	Z16ER2.0ISO	Z16EL2.0ISO	2.00	3.52	9.525	4.0	★	○
	Z16ER2.5ISO	Z16EL2.5ISO	2.50	3.52	9.525	4.0	★	○
	Z16ER3.0ISO	Z16EL3.0ISO	3.00	3.52	9.525	4.0	★	○
	Z22ER3.5ISO	Z22EL3.5ISO	3.50	4.65	12.7	5.0	★	○
	Z22ER4.0ISO	Z22EL4.0ISO	4.00	4.65	12.7	5.0	★	○
	Z22ER4.5ISO	Z22EL4.5ISO	4.50	4.65	12.7	5.0	★	○
	Z22ER5.0ISO	Z22EL5.0ISO	5.00	4.65	12.7	5.0	★	○
	Z22ER5.5ISO	Z22EL5.5ISO	5.50	4.65	12.7	5.0	★	○
	Z22ER6.0ISO	Z22EL6.0ISO	6.00	4.65	12.7	5.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



General turning
Parting and grooving
Threading

Threading insert

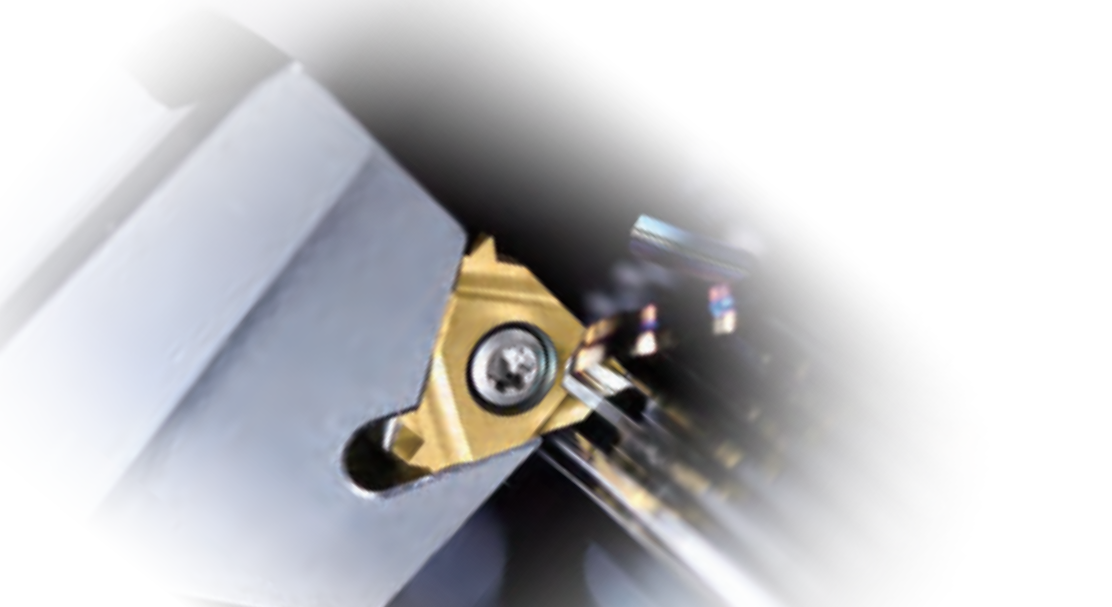


ISO metric thread (with end)

ISO 965-1980 DIN 13
GB/T 197-2003 Tolerance class: 6g/6H

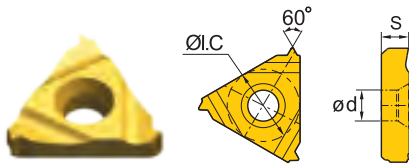

R type

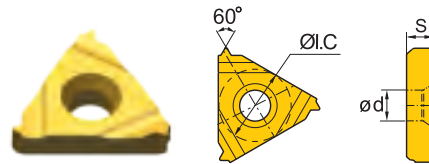

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z111R0.5ISO	Z111L0.5ISO	0.50	3.05	6.35	3.2	★	○
	Z111R0.75ISO	Z111L0.75ISO	0.75	3.05	6.35	3.2	★	○
	Z111R1.0ISO	Z111L1.0ISO	1.00	3.05	6.35	3.2	★	○
	Z111R1.25ISO	Z111L1.25ISO	1.25	3.05	6.35	3.2	★	○
	Z111R1.5ISO	Z111L1.5ISO	1.50	3.05	6.35	3.2	★	○
	Z111R1.75ISO	Z111L1.75ISO	1.75	3.05	6.35	3.2	★	○
	Z111R2.0ISO	Z111L2.0ISO	2.00	3.05	6.35	3.2	★	○
	Z161R0.5ISO	Z161L0.5ISO	0.50	3.52	9.525	4.0	★	○
	Z161R0.75ISO	Z161L0.75ISO	0.75	3.52	9.525	4.0	★	○
	Z161R1.0ISO	Z161L1.0ISO	1.00	3.52	9.525	4.0	★	○
	Z161R1.25ISO	Z161L1.25ISO	1.25	3.52	9.525	4.0	★	○
	Z161R1.5ISO	Z161L1.5ISO	1.50	3.52	9.525	4.0	★	○
	Z161R1.75ISO	Z161L1.75ISO	1.75	3.52	9.525	4.0	★	○
	Z161R2.0ISO	Z161L2.0ISO	2.00	3.52	9.525	4.0	★	○
	Z161R2.5ISO	Z161L2.5ISO	2.50	3.52	9.525	4.0	★	○
	Z161R3.0ISO	Z161L3.0ISO	3.00	3.52	9.525	4.0	★	○
	Z221R3.5ISO	Z221L3.5ISO	3.50	4.65	12.7	5.0	★	○
	Z221R4.0ISO	Z221L4.0ISO	4.00	4.65	12.7	5.0	★	○
	Z221R4.5ISO	Z221L4.5ISO	4.50	4.65	12.7	5.0	★	○
	Z221R5.0ISO	Z221L5.0ISO	5.00	4.65	12.7	5.0	★	○
Z221R5.5ISO	Z221L5.5ISO	5.50	4.65	12.7	5.0	★	○	
Z221R6.0ISO	Z221L6.0ISO	6.00	4.65	12.7	5.0	★	○	

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading insert



TURNING Threading Tools

Threading insert

General turning

Parting and grooving

Threading


Threading insert

General pitch thread (without end)



		Type		Basic dimensions(mm)				Recommended coating grade		
		The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG203	YBG205
External thread	55°	Z16ERA55	Z16ELA55	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★	○
		Z16ERG55	Z16ELG55	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★	○
		Z16ERAG55	Z16ELAG55	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★	○
		Z22ERN55	Z22ELN55	3.5-5.0(7-5)	4.65	12.7	5.0	55°	★	○
	60°	Z16ERA60	Z16ELA60	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★	○
		Z16ERG60	Z16ELG60	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★	○
		Z16ERAG60	Z16ELAG60	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★	○
		Z22ERN60	Z22ELN60	3.5-5.0(7-5)	4.65	12.7	5.0	60°	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

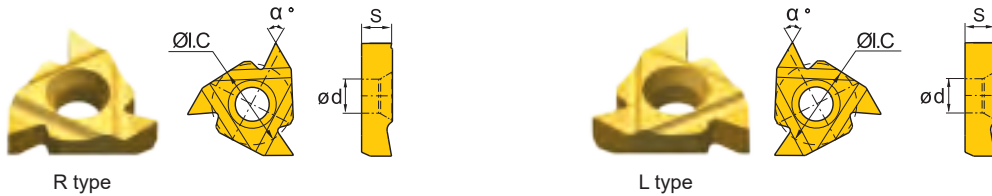



		Type		Basic dimensions(mm)				Recommended coating grade		
		The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG203	YBG205
Internal thread	55°	Z11IRA55	Z11ILA55	0.5-1.5(48-16)	3.05	6.35	3.2	55°	★	○
		Z16IRA55	Z16ILA55	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★	○
		Z16IRG55	Z16ILG55	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★	○
		Z16IRAG55	Z16ILAG55	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★	○
		Z22IRN55	Z22ILN55	3.5-5.0(7-5)	4.65	12.7	5.0	55°	★	○
	60°	Z11IRA60	Z11ILA60	0.5-1.5(48-16)	3.05	6.35	3.2	60°	★	○
		Z16IRA60	Z16ILA60	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★	○
		Z16IRG60	Z16ILG60	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★	○
		Z16IRAG60	Z16ILAG60	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★	○
		Z22IRN60	Z22ILN60	3.5-5.0(7-5)	4.65	12.7	5.0	60°	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order




Whitworth thread (with end)

ISO 228/1:1982,
DIN 259, B.S.84:1956
Tolerance class: Medium class A

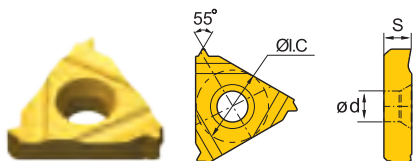


R type

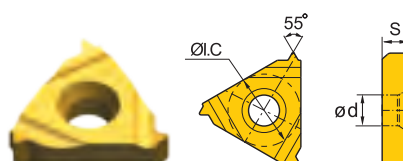


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER8W	Z16EL8W	8	3.52	9.525	4.0	★	○
	Z16ER9W	Z16EL9W	9	3.52	9.525	4.0	★	○
	Z16ER10W	Z16EL10W	10	3.52	9.525	4.0	★	○
	Z16ER11W	Z16EL11W	11	3.52	9.525	4.0	★	○
	Z16ER12W	Z16EL12W	12	3.52	9.525	4.0	★	○
	Z16ER14W	Z16EL14W	14	3.52	9.525	4.0	★	○
	Z16ER16W	Z16EL16W	16	3.52	9.525	4.0	★	○
	Z16ER18W	Z16EL18W	18	3.52	9.525	4.0	★	○
	Z16ER19W	Z16EL19W	19	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

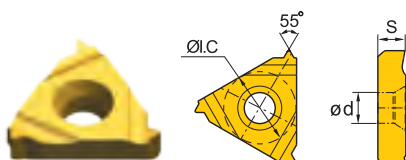

R type

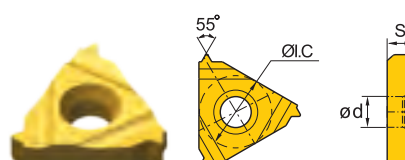

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z16IR8W	Z16IL8W	8	3.52	9.525	4.0	★	○
	Z16IR9W	Z16IL9W	9	3.52	9.525	4.0	★	○
	Z16IR10W	Z16IL10W	10	3.52	9.525	4.0	★	○
	Z16IR11W	Z16IL11W	11	3.52	9.525	4.0	★	○
	Z16IR12W	Z16IL12W	12	3.52	9.525	4.0	★	○
	Z16IR14W	Z16IL14W	14	3.52	9.525	4.0	★	○
	Z16IR16W	Z16IL16W	16	3.52	9.525	4.0	★	○
	Z16IR18W	Z16IL18W	18	3.52	9.525	4.0	★	○
	Z16IR19W	Z16IL19W	19	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading insert



TURNING Threading Tools

Threading insert

General turning



Parting and grooving

Threading


Threading insert

Unified thread (with end)

ASME B1.1-1989
Tolerance class: 2A/2B

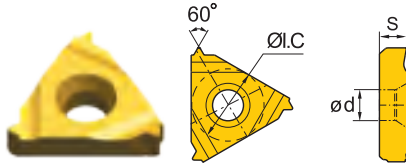


R type

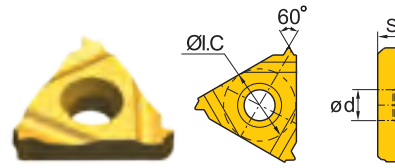


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER8UN	Z16EL8UN	8	3.52	9.525	4.0	★	○
	Z16ER10UN	Z16EL10UN	10	3.52	9.525	4.0	★	○
	Z16ER12UN	Z16EL12UN	12	3.52	9.525	4.0	★	○
	Z16ER14UN	Z16EL14UN	14	3.52	9.525	4.0	★	○
	Z16ER16UN	Z16EL16UN	16	3.52	9.525	4.0	★	○
	Z16ER18UN	Z16EL18UN	18	3.52	9.525	4.0	★	○
	Z16ER20UN	Z16EL20UN	20	3.52	9.525	4.0	★	○
	Z16ER24UN	Z16EL24UN	24	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order

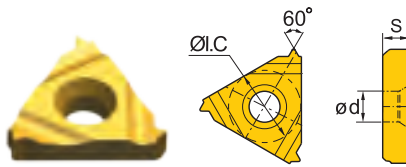

R type

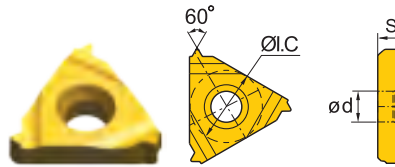

L type



	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z16IR8UN	Z16IL8UN	8	3.52	9.525	4.0	★	○
	Z16IR10UN	Z16IL10UN	10	3.52	9.525	4.0	★	○
	Z16IR12UN	Z16IL12UN	12	3.52	9.525	4.0	★	○
	Z16IR14UN	Z16IL14UN	14	3.52	9.525	4.0	★	○
	Z16IR16UN	Z16IL16UN	16	3.52	9.525	4.0	★	○
	Z16IR18UN	Z16IL18UN	18	3.52	9.525	4.0	★	○
	Z16IR20UN	Z16IL20UN	20	3.52	9.525	4.0	★	○
	Z16IR24UN	Z16IL24UN	24	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order




British standard taper piper thread (with end)

ISO 7/1:1994
B.S.21:1985
Standard BSPT

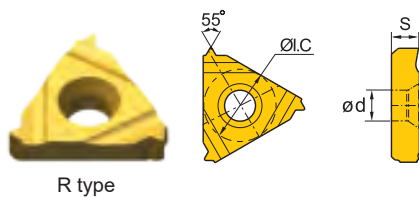


R type

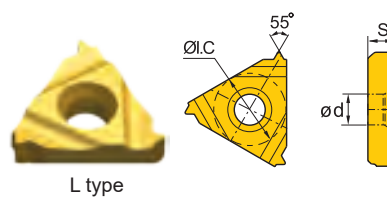


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	Ø1.C	Ød	YBG203	YBG205
External thread	Z16ER11BSPT	Z16EL11BSPT	11	3.52	9.525	4.0	★	○
	Z16ER14BSPT	Z16EL14BSPT	14	3.52	9.525	4.0	★	○
	Z16ER19BSPT	Z16EL19BSPT	19	3.52	9.525	4.0	★	○
	Z16ER28BSPT	Z16EL28BSPT	28	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

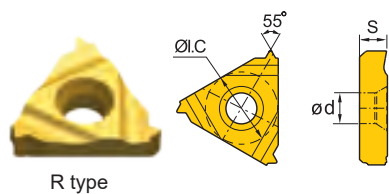

R type

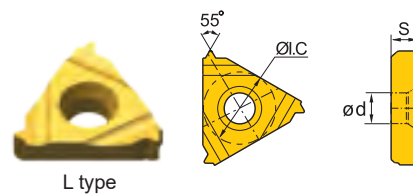

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	Ø1.C	Ød	YBG203	YBG205
Internal thread	Z16IR11BSPT	Z16IL11BSPT	11	3.52	9.525	4.0	★	○
	Z16IR14BSPT	Z16IL14BSPT	14	3.52	9.525	4.0	★	○
	Z16IR19BSPT	Z16IL19BSPT	19	3.52	9.525	4.0	★	○
	Z16IR28BSPT	Z16IL28BSPT	28	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading insert



TURNING Threading Tools

Threading insert

General turning



Parting and grooving

Threading


Threading insert

American standard taper pipe thread (with end)

ASME B1.20.1-1983
Standard NPT

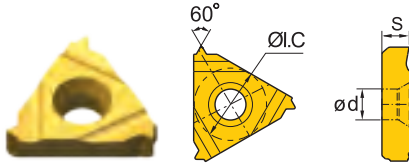


R type

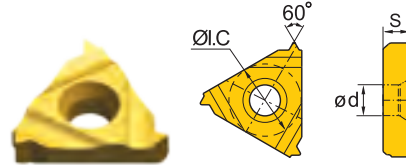


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	Ø1.C	ød	YBG203	YBG205
External thread	Z16ER8NPT	Z16EL8NPT	8	3.52	9.525	4.0	★	○
	Z16ER11.5NPT	Z16EL11.5NPT	11.5	3.52	9.525	4.0	★	○
	Z16ER14NPT	Z16EL14NPT	14	3.52	9.525	4.0	★	○
	Z16ER18NPT	Z16EL18NPT	18	3.52	9.525	4.0	★	○
	Z16ER27NPT	Z16EL27NPT	27	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

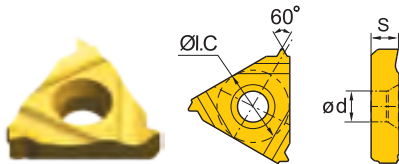

R type

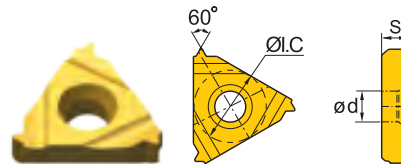

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	Ø1.C	ød	YBG203	YBG205
Internal thread	Z16IR8NPT	Z16IL8NPT	8	3.52	9.525	4.0	★	○
	Z16IR11.5NPT	Z16IL11.5NPT	11.5	3.52	9.525	4.0	★	○
	Z16IR14NPT	Z16IL14NPT	14	3.52	9.525	4.0	★	○
	Z16IR18NPT	Z16IL18NPT	18	3.52	9.525	4.0	★	○
	Z16IR27NPT	Z16IL27NPT	27	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



Threading inserts code key

Cutting direction

R > Right rotation L > Left rotation

Insert shape



T

Other

Z

22 > Indicates that the inner cutting circle diameter of the blade is 12.7

16 > Indicates that the inner cutting circle diameter of the blade is 9.525

11 > Indicates that the inner cutting circle diameter of the blade is 6.35

Number of cutting edge teeth

01 > Number of teeth per cutting edge

Cutting Type

W > External thread cutting inserts

N > Internal thread cutting inserts

R T 16. 01 W- 3.00 GM (B)

Pitch

Full tooth shape
(pitch range is indicated by numbers)

mm	TPI
0.35-9.0	72-2

V-tooth
(pitch range is indicated by letter)

	mm	TPI
A	0.5-1.5	48-16
AG	0.5-3.0	48-8
G	1.75-3.0	14-8
N	3.5-5.0	7-5
Q	5.5-6.0	4 1/2-4

Threaded tooth shape

GM	ISO metric 60° thread
60	60° general pitch thread
55	55° general pitch thread
W	Whitworth thread
UN	Unified thread
BSPT	British standard pipe thread
NPT	American standard pipe thread

Supplementary number

B > Thin Threaded Inserts

TURNING Threading Tools

Threading tools

General turning

Parting and grooving


Threading

Threading tools


ISO metric thread (with end) **Thin type**

ISO 965-1980, DIN 13, GB/T 197-2003

Tolerance class: 6g/6H



R type




	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm	S	ØI.C	ød	YBG202
External thread	RT16.01W-0.50GMB	0.50	3.52	9.525	4.0	★
	RT16.01W-0.75GMB	0.75	3.52	9.525	4.0	★
	RT16.01W-1.00GMB	1.00	3.52	9.525	4.0	★
	RT16.01W-1.25GMB	1.25	3.52	9.525	4.0	★
	RT16.01W-1.50GMB	1.50	3.52	9.525	4.0	★
	RT16.01W-1.75GMB	1.75	3.52	9.525	4.0	★
	RT16.01W-2.00GMB	2.00	3.52	9.525	4.0	★
	RT16.01W-2.50GMB	2.50	3.52	9.525	4.0	★
	RT16.01W-3.00GMB	3.00	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type



	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm	S	ØI.C	ød	YBG202
Internal thread	RT16.01N-0.50GMB	0.50	3.52	9.525	4.0	★
	RT16.01N-0.75GMB	0.75	3.52	9.525	4.0	★
	RT16.01N-1.00GMB	1.00	3.52	9.525	4.0	★
	RT16.01N-1.25GMB	1.25	3.52	9.525	4.0	★
	RT16.01N-1.50GMB	1.50	3.52	9.525	4.0	★
	RT16.01N-1.75GMB	1.75	3.52	9.525	4.0	★
	RT16.01N-2.00GMB	2.00	3.52	9.525	4.0	★
	RT16.01N-2.50GMB	2.50	3.52	9.525	4.0	★
	RT16.01N-3.00GMB	3.00	3.52	9.525	4.0	★



★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



General pitch thread (without end) Thin type



R type



		Type	Basic dimensions(mm)				Recommended coating grade	
		The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG202
External thread	60°	RT16.01W-A60B	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★
		RT16.01W-G60B	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★
		RT16.01W-AG60B	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★
	55°	RT16.01W-A55B	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★
		RT16.01W-G55B	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★
		RT16.01W-AG55B	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning



Parting and grooving

Threading

Threading tools



R type



		Type	Basic dimensions(mm)				Recommended coating grade	
		The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG202
Internal thread	60°	RT16.01N-A60B	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★
		RT16.01N-G60B	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★
		RT16.01N-AG60B	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★
	55°	RT16.01N-A55B	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★
		RT16.01N-G55B	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★
		RT16.01N-AG55B	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

A TURNING Threading Tools

Threading tools

General turning

Parting and grooving


Threading

Threading tools


Whitworth thread (with end) **Thin type**

ISO 228/1:1982, DIN 259, B.S.84:1956

Tolerance class: Medium class A



R type




	Type	Basic dimensions(mm)				Recommended coating grade
		Pitch/mm (pitch/Inch)	S	ØI.C	ød	
	The right hand tools					YBG202
External thread	RT16.01W-8WB	8	3.52	9.525	4.0	★
	RT16.01W-9WB	9	3.52	9.525	4.0	★
	RT16.01W-10WB	10	3.52	9.525	4.0	★
	RT16.01W-11WB	11	3.52	9.525	4.0	★
	RT16.01W-12WB	12	3.52	9.525	4.0	★
	RT16.01W-14WB	14	3.52	9.525	4.0	★
	RT16.01W-16WB	16	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type




	Type	Basic dimensions(mm)				Recommended coating grade
		Pitch/mm (pitch/Inch)	S	ØI.C	ød	
	The right hand tools					YBG202
Internal thread	RT16.01N-8WB	8	3.52	9.525	4.0	★
	RT16.01N-9WB	9	3.52	9.525	4.0	★
	RT16.01N-10WB	10	3.52	9.525	4.0	★
	RT16.01N-11WB	11	3.52	9.525	4.0	★
	RT16.01N-12WB	12	3.52	9.525	4.0	★
	RT16.01N-14WB	14	3.52	9.525	4.0	★
	RT16.01N-16WB	16	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order




Unified thread (with end) **Thin type**

ASME B1.1-1989
Tolerance class: 2A/2B



R type




	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
External thread	RT16.01W-8UNB	8	3.52	9.525	4.0	★
	RT16.01W-10UNB	10	3.52	9.525	4.0	★
	RT16.01W-12UNB	12	3.52	9.525	4.0	★
	RT16.01W-14UNB	14	3.52	9.525	4.0	★
	RT16.01W-16UNB	16	3.52	9.525	4.0	★
	RT16.01W-18UNB	18	3.52	9.525	4.0	★
	RT16.01W-20UNB	20	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type



	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
Internal thread	RT16.01N-8UNB	8	3.52	9.525	4.0	★
	RT16.01N-10UNB	10	3.52	9.525	4.0	★
	RT16.01N-12UNB	12	3.52	9.525	4.0	★
	RT16.01N-14UNB	14	3.52	9.525	4.0	★
	RT16.01N-16UNB	16	3.52	9.525	4.0	★
	RT16.01N-18UNB	18	3.52	9.525	4.0	★
	RT16.01N-20UNB	20	3.52	9.525	4.0	★
	RT16.01N-24UNB	24	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading tools

A TURNING Threading Tools

Threading tools

General turning

Parting and grooving


Threading

Threading tools


British standard taper piper thread (with end)

Thin type

ISO 7/1:1994,B.S.21:1985
Standard BSPT



R type




	Type	Basic dimensions(mm)				Recommended coating grade
		Pitch/mm (pitch/Inch)	S	ØI.C	ød	
	The right hand tools					YBG202
External thread	RT16.01W-11BSPTB	11	3.52	9.525	4.0	★
	RT16.01W-14BSPTB	14	3.52	9.525	4.0	★
	RT16.01W-19BSPTB	19	3.52	9.525	4.0	★
	RT16.01W-28BSPTB	28	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type




	Type	Basic dimensions(mm)				Recommended coating grade
		Pitch/mm (pitch/Inch)	S	ØI.C	ød	
	The right hand tools					YBG202
Internal thread	RT16.01N-11BSPTB	11	3.52	9.525	4.0	★
	RT16.01N-14BSPTB	14	3.52	9.525	4.0	★
	RT16.01N-19BSPTB	19	3.52	9.525	4.0	★
	RT16.01N-28BSPTB	28	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order




American standard taper pipe thread (with end) Thin type

ASME B1.20.1-1983
Standard NPT



R type




	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
External thread	RT16.01W-8NPTB	8	3.52	9.525	4.0	★
	RT16.01W-11.5NPTB	11.5	3.52	9.525	4.0	★
	RT16.01W-14NPTB	14	3.52	9.525	4.0	★
	RT16.01W-18NPTB	18	3.52	9.525	4.0	★
	RT16.01W-27NPTB	27	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type



	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
Internal thread	RT16.01N-8NPTB	8	3.52	9.525	4.0	★
	RT16.01N-11.5NPTB	11.5	3.52	9.525	4.0	★
	RT16.01N-14NPTB	14	3.52	9.525	4.0	★
	RT16.01N-18NPTB	18	3.52	9.525	4.0	★
	RT16.01N-27NPTB	27	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading tools

A TURNING Threading Tools

Threading tools

Threading tools code key

General turning
Parting and grooving
Threading

Threading tools

Clamping system

Top clamping Screw clamping

ZC **ZS**

Thread type

I > Internal thread
E > External thread

Cutting direction

Right hand Left hand

R **L**

ZS E R 20 20 K 16

Nose height

Note: 00 for round tool holder.
Only to integer, for example:
h=8mm is labeled as 08.

Shank width

Note: Diameter for round tool holder
for example: b=8mm is labeled as 08.

Tool length

Code	H	K	M	P	Q	R	S	T	U
Length	100	125	150	170	180	200	250	300	350

Insert size


Code	11	16	22
Triangle side length	11	16	22
Inscribed circle	6.35	9.525	12.70



External threading tools



R-type shown

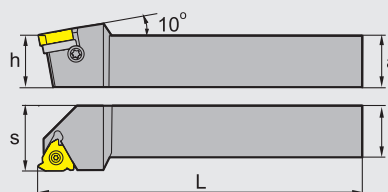

Type	Stock	Basic dimensions(mm)					Applicable inserts	Inserts screw	Shim	Shim screw	Wrench	
		a	h	b	L	s						
ZSER	1616H16	▲	16	16	16	100						
	2020K16	▲	20	20	20	125						25
	2525M16	▲	25	25	25	150						32
	3225P16	▲	32	32	25	170						32
	3232P16	▲	32	32	32	170						40
	2525M22	▲	25	25	25	150						32
	3225P22	▲	32	32	25	170						32
	3232P22	▲	32	32	32	170						40
4040S22	△	40	40	40	250	50						
ZSEL	1616H16	▲	16	16	16	100						
	2020K16	▲	20	20	20	125						25
	2525M16	▲	25	25	25	150						32
	3225P16	▲	32	32	25	170						32
	3232P16	▲	32	32	32	170						40
	2525M22	▲	25	25	25	150						32
	3225P22	▲	32	32	25	170						32
	3232P22	▲	32	32	32	170						40
4040S22	△	40	40	40	250	50						

▲Stock available

△Make-to-order

General turning

Parting and grooving


Threading

Threading tools

Internal threading tools



R-type shown

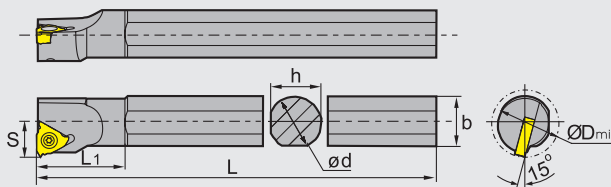


Type	Stock	Basic dimensions(mm)							Applicable inserts	Inserts screw	Shim	Shim screw	Wrench			
		d	L	b	D _{min}	s	h	L ₁								
ZSIR	0016K11	▲	16	125	15.5	12	10	15	20.9	Z11IR□□□□	I60 M2.5X6.5T	---	---	WT08IP		
	0016M11	▲	16	150	16	16	10.5	15	25.9		I60 M3.5X08TT	---	---			
	0016M16	▲	16	150	15.5	20	12	15	27			Z16IR□□□□	I60 M3.5X12TT		MT16-□□MN	SM4X8C
	0020M16	▲	20	150	19	25	14	18	28.7	I60 M5×13.2			---	---		
	0020Q16	▲	20	180	19	25	14	18	34			Z22IR□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0025M16	▲	25	150	24	32	17	23	28.8				I60 M4×15X	MT22-□□MN	SM5X8.5	
	0032R16	▲	32	200	31	40	22	30	30.9	Z11IL□□□□	I60 M2.5X6.5T	---		---	WT07IP	
	0032S16	▲	32	250	31	40	22	30	30.9		I60 M3.5X08TT	---		---		
	0040T16	▲	40	300	38.5	50	27	37	31.5			Z16IL□□□□		I60 M3.5X12TT		MT16-□□MN
	0050U16	▲	50	350	48.5	63	35	49	40.2	I60 M5×13.2				---	---	
	0020Q22	▲	20	180	19	25	15	18	35			Z22IL□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0025R22	▲	25	200	24	32	19	23	39				I60 M4×15X	MT22-□□MN	SM5X8.5	
	0032S22	▲	32	250	31	40	22	30	36.4	Z11IL□□□□	I60 M2.5X6.5T	---		---	WT07IP	
	0040T22	▲	40	300	38.5	50	27	37	37.2		I60 M3.5X08TT	---		---		
	0050U22	▲	50	350	48.5	63	35	47	42.6			Z16IL□□□□		I60 M3.5X12TT		MT16-□□MN
0016K11	▲	16	125	15.5	12	10	15	20.9	I60 M5×13.2	---				---		
0016M11	▲	16	150	16	16	10.5	15	25.9		Z22IL□□□□		I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	
0016M16	▲	16	150	16	20	12	15	27				I60 M4×15X	MT22-□□MN	SM5X8.5		
0020M16	▲	20	150	19	25	14	18	28.7	Z16IL□□□□	I60 M3.5X12TT	MT16-□□MN		SM4X8C	WT15IP		
0020Q16	▲	20	180	19	25	14	18	34		I60 M5×13.2	---		---			
0025M16	▲	25	150	24	32	17	23	28.8			Z22IL□□□□		I60 M4×15X		MT22-□□MN	SM5X8.5
0032R16	▲	32	200	31	40	22	30	30.9	I60 M4×15X	MT22-□□MN			SM5X8.5			
0032S16	▲	32	250	31	40	22	30	30.9		Z11IL□□□□	I60 M2.5X6.5T	---	---	WT07IP		
0040T16	▲	40	300	38.5	50	27	37	31.5			I60 M3.5X08TT	---	---			
0050U16	▲	50	350	48.5	63	35	49	40.2				Z16IL□□□□	I60 M3.5X12TT		MT16-□□MN	SM4X8C
0020Q22	▲	20	180	19	25	15	18	35		I60 M5×13.2			---	---		
0025R22	▲	25	200	24	32	19	23	39	Z22IL□□□□			I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	
0032S22	▲	32	250	31	40	22	30	36.4				I60 M4×15X	MT22-□□MN	SM5X8.5		
0040T22	▲	40	300	38.5	50	27	37	37.2	Z11IL□□□□	I60 M2.5X6.5T	---		---	WT07IP		
0050U22	▲	50	350	48.5	63	35	47	42.6		I60 M3.5X08TT	---		---			
0016K11	▲	16	125	15.5	12	10	15	20.9			Z16IL□□□□		I60 M3.5X12TT		MT16-□□MN	SM4X8C
0016M11	▲	16	150	16	16	10.5	15	25.9	I60 M5×13.2				---	---		
0016M16	▲	16	150	16	20	12	15	27			Z22IL□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	
0020M16	▲	20	150	19	25	14	18	28.7				I60 M4×15X	MT22-□□MN	SM5X8.5		
0020Q16	▲	20	180	19	25	14	18	34	Z16IL□□□□	I60 M3.5X12TT	MT16-□□MN		SM4X8C	WT15IP		
0025M16	▲	25	150	24	32	17	23	28.8		I60 M5×13.2	---		---			
0032R16	▲	32	200	31	40	22	30	30.9			Z22IL□□□□		I60 M4×15X		MT22-□□MN	SM5X8.5
0032S16	▲	32	250	31	40	22	30	30.9	I60 M4×15X	MT22-□□MN			SM5X8.5			
0040T16	▲	40	300	38.5	50	27	37	31.5		Z11IL□□□□	I60 M2.5X6.5T	---	---	WT07IP		
0050U16	▲	50	350	48.5	63	35	49	40.2			I60 M3.5X08TT	---	---			
0020Q22	▲	20	180	19	25	15	18	35				Z16IL□□□□	I60 M3.5X12TT		MT16-□□MN	SM4X8C
0025R22	▲	25	200	24	32	19	23	39		I60 M5×13.2			---	---		
0032S22	▲	32	250	31	40	22	30	36.4	Z22IL□□□□			I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	
0040T22	▲	40	300	38.5	50	27	37	37.2				I60 M4×15X	MT22-□□MN	SM5X8.5		
0050U22	▲	50	350	48.5	63	35	47	42.6	Z11IL□□□□	I60 M2.5X6.5T	---		---	WT07IP		
0016K11	▲	16	125	15.5	12	10	15	20.9		Z16IL□□□□	I60 M3.5X12TT		MT16-□□MN		SM4X8C	WT15IP
0016M11	▲	16	150	16	16	10.5	15	25.9			I60 M5×13.2		---		---	
0016M16	▲	16	150	16	20	12	15	27	Z22IL□□□□	I60 M4×15X			MT22-□□MN	SM5X8.5	WT20IP	
0020M16	▲	20	150	19	25	14	18	28.7		I60 M4×15X		MT22-□□MN	SM5X8.5			
0020Q16	▲	20	180	19	25	14	18	34	Z16IL□□□□		I60 M3.5X12TT	MT16-□□MN	SM4X8C	WT15IP		
0025M16	▲	25	150	24	32	17	23	28.8			I60 M5×13.2	---	---			
0032R16	▲	32	200	31	40	22	30	30.9				Z22IL□□□□	I60 M4×15X		MT22-□□MN	SM5X8.5
0032S16	▲	32	250	31	40	22	30	30.9	I60 M4×15X		MT22-□□MN		SM5X8.5			
0040T16	▲	40	300	38.5	50	27	37	31.5		Z11IL□□□□	I60 M2.5X6.5T	---	---	WT07IP		
0050U16	▲	50	350	48.5	63	35	49	40.2			I60 M3.5X08TT	---	---			
0020Q22	▲	20	180	19	25	15	18	35				Z16IL□□□□	I60 M3.5X12TT		MT16-□□MN	SM4X8C
0025R22	▲	25	200	24	32	19	23	39		I60 M5×13.2			---	---		
0032S22	▲	32	250	31	40	22	30	36.4	Z22IL□□□□			I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	
0040T22	▲	40	300	38.5	50	27	37	37.2				I60 M4×15X	MT22-□□MN	SM5X8.5		
0050U22	▲	50	350	48.5	63	35	47	42.6	Z11IL□□□□	I60 M2.5X6.5T	---		---	WT07IP		
0016K11	▲	16	125	15.5	12	10	15	20.9		Z16IL□□□□	I60 M3.5X12TT		MT16-□□MN		SM4X8C	WT15IP
0016M11	▲	16	150	16	16	10.5	15	25.9			I60 M5×13.2		---		---	
0016M16	▲	16	150	16	20	12	15	27	Z22IL□□□□	I60 M4×15X			MT22-□□MN	SM5X8.5	WT20IP	
0020M16	▲	20	150	19	25	14	18	28.7		I60 M4×15X		MT22-□□MN	SM5X8.5			
0020Q16	▲	20	180	19	25	14	18	34	Z16IL□□□□		I60 M3.5X12TT	MT16-□□MN	SM4X8C	WT15IP		
0025M16	▲	25	150	24	32	17	23	28.8			I60 M5×13.2	---	---			
0032R16	▲	32	200	31	40	22	30	30.9				Z22IL□□□□	I60 M4×15X		MT22-□□MN	SM5X8.5
0032S16	▲	32	250	31	40	22	30	30.9	I60 M4×15X		MT22-□□MN		SM5X8.5			
0040T16	▲	40	300	38.5	50	27	37	31.5		Z11IL□□□□	I60 M2.5X6.5T	---	---	WT07IP		
0050U16	▲	50	350	48.5	63	35	49	40.2			I60 M3.5X08TT	---	---			
0020Q22	▲	20	180	19	25	15	18	35				Z16IL□□□□	I60 M3.5X12TT		MT16-□□MN	SM4X8C
0025R22	▲	25	200	24	32	19	23	39		I60 M5×13.2			---	---		
0032S22	▲	32	250	31	40	22	30	36.4	Z22IL□□□□			I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	
0040T22	▲	40	300	38.5	50	27	37	37.2				I60 M4×15X	MT22-□□MN	SM5X8.5		
0050U22	▲	50	350	48.5	63	35	47	42.6	Z11IL□□□□	I60 M2.5X6.5T	---		---	WT07IP		
0016K11	▲	16	125	15.5	12	10	15	20.9		Z16IL□□□□	I60 M3.5X12TT		MT16-□□MN		SM4X8C	WT15IP
0016M11	▲	16	150	16	16	10.5	15	25.9			I60 M5×13.2		---		---	
0016M16	▲	16	150	16	20	12	15	27	Z22IL□□□□	I60 M4×15X			MT22-□□MN	SM5X8.5	WT20IP	
0020M16	▲	20	150	19	25	14	18	28.7		I60 M4×15X		MT22-□□MN	SM5X8.5			
0020Q16	▲	20	180	19	25	14	18	34	Z16IL□□□□		I60 M3.5X12TT	MT16-□□MN	SM4X8C	WT15IP		
0025M16	▲	25	150	24	32	17	23	28.8			I60 M5×13.2	---	---			
0032R16	▲	32	200	31	40	22	30	30.9				Z22IL□□□□	I60 M4×15X		MT22-□□MN	SM5X8.5
0032S16	▲	32	250	31	40	22	30	30.9	I60 M4×15X		MT22-□□MN		SM5X8.5			
0040T16	▲	40	300	38.5	50	27	37	31.5		Z11IL□□□□	I60 M2.5X6.5T	---	---	WT07IP		
0050U16	▲	50	350	48.5	63	35	49	40.2			I60 M3.5X08TT	---	---			
0020Q22	▲	20	180	19	25	15	18	35				Z16IL□□□□	I60 M3.5X12TT			

Please follow the following steps to get the best threading result:


- 1 Select proper thread machining method.
- 2 Define helical angle and select shim.
- 3 Select proper insert and tool holder size.
- 4 By checking reference table of standard threading programs, select feasible cutting parameters.
- 5 Select feed way.

Machining method of threading tools


External threading machining (Right thread)

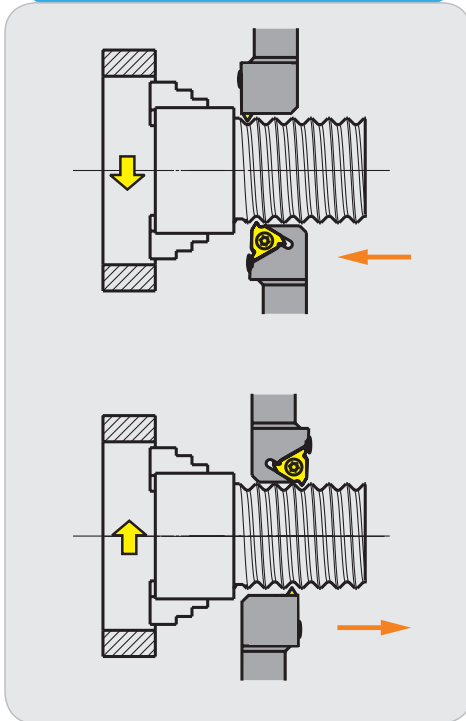


External threading machining (Left thread)

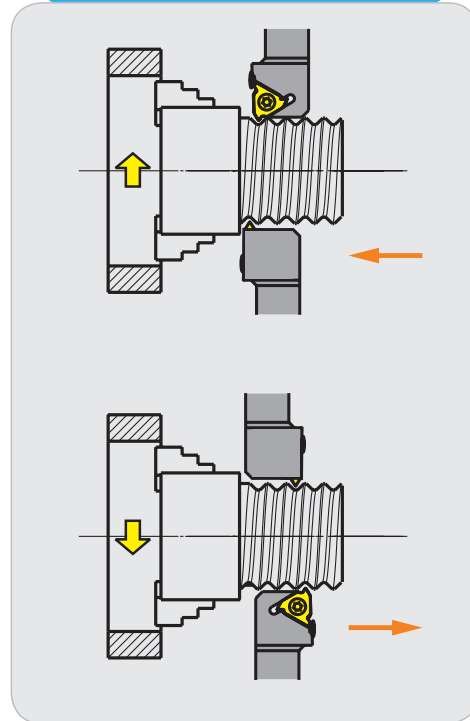

Internal threading machining (Right thread)

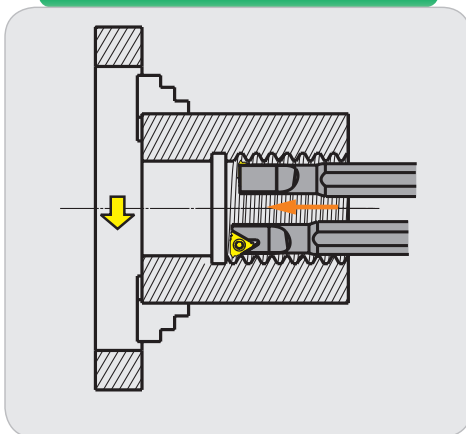

Internal threading machining (Left thread)

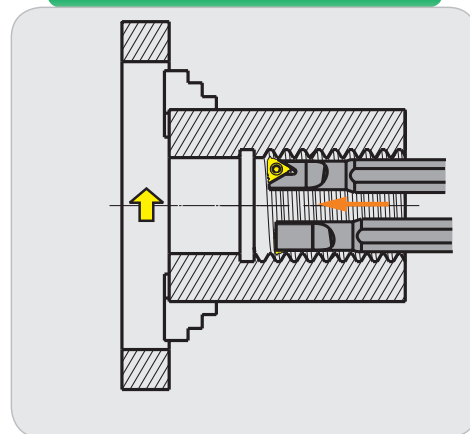



TURNING Threading Tools

Application information of threading

Decide helical angle and select shim

The clearance angle of threading inserts is actually along the edge (flank). This has significant effect on heat diffusion, spread of abrasion as well as tool life, security and pitch quality. The clearance angle of threading pitch on clearance face is determined by thread helical angle. These two angles are similar to each other to some extent. If inclined angle of insert is different from the helical angle, then the clearance angle won't be the same either.

The helical angle of pitch has to be the same with the inclined angle of insert to prevent over wearing on the clearance face which could affect tool life. the helical angle is calculated as below:

$$e = \arctan \frac{p}{d_2 \times \pi}$$

P= Pitch

d₂= pitch diameter

The most common inclined angle is 1°. MT standard shim and its inclined angle is also 1°.

Calculation of clearance angle:

Clearance angle is calculated as below:

$$\beta = \arctan (\tan \theta \times \tan \alpha)$$

2θ=Thread profile angle

α=The rake angle of external standard threading tools is 10°; the rake angle of internal standard threading tools is 15°.

The shim has to be changed when helical angle of thread is ≤ clearance angle of tool, which could cause intervene on insert flank.


Please change the shim to adjust the difference between helical angle of thread and inclined angle of shim to be within 2°~0°.

For example: when P=1.5, d₂=24mm, helical angle 1.14°-(2°~0°)=inclined angle (-0.86°~1.14°) it is feasible to use standard shim 1°.

Shim specification table is as follows:

Screw pitch range	Insert dimensions	Inclined angle	Shim
0.5-3.0	16	0	MT16-00MN
		1	MT16-01MN
		2	MT16-02MN
		3	MT16-03MN
3.5-6.0	22	0	MT22-00MN
		1	MT22-01MN
		2	MT22-02MN
		3	MT22-03MN


Note: the standard angle of shim for our threading tools is 1°. ((MT16-01MN or MT22-01MN))

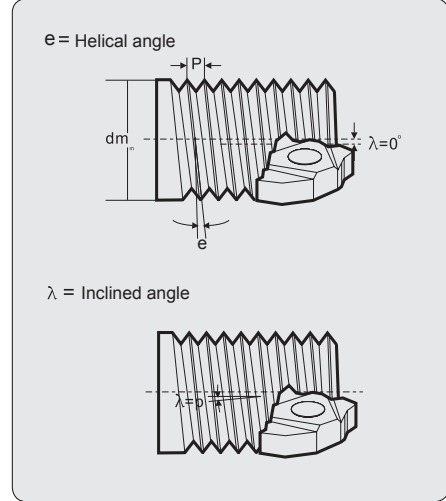

Please refer to the table below for actual value:

Thread profile angle 2θ	β	
	External thread	Internal thread
60°	5.8°	8.79°
55°	5.24°	7.94°
30°	2.7°	4.1°
29°	2.6°	3.96°

Select shim:

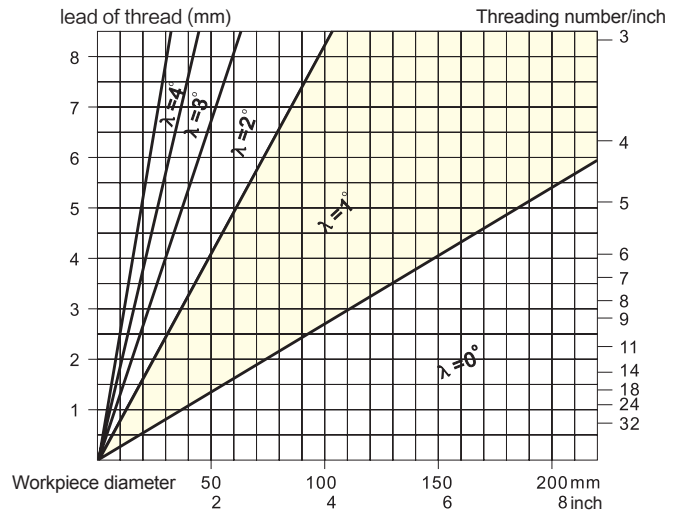



Select proper inserts and size of tool holder (Please refer to detailed table of threading tools and inserts)

Parameter table for threading program under different standards

■ Table of recommended in-feed for metric ISO external threading with wiper edge

Screw pitch	1.0	1.25	1.5	1.75	2.0	2.5	3.0	4.0	5.0
Total in-feed	0.72	0.86	1.02	1.17	1.33	1.63	1.94	2.58	3.21
Number of passes	5	6	7	8	9	11	13	15	17
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)								
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.20/-	0.20/-	0.21/-	0.22/-	0.24/-	0.25/-	0.26/-	0.35/-	0.40/-
2	0.18/0.10	0.18/0.10	0.18/0.10	0.20/0.12	0.22/0.13	0.24/0.14	0.24/0.14	0.30/0.17	0.35/0.20
3	0.16/0.09	0.14/0.09	0.18/0.10	0.18/0.10	0.20/0.12	0.21/0.12	0.20/0.12	0.25/0.14	0.30/0.17
4	0.10/0.06	0.10/0.08	0.15/0.09	0.15/0.09	0.15/0.09	0.18/0.10	0.20/0.12	0.20/0.12	0.28/0.16
5	0.08/-	0.08/0.06	0.12/0.07	0.13/0.08	0.12/0.07	0.15/0.09	0.18/0.10	0.18/0.10	0.25/0.14
6			0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.18/0.10	0.20/0.12
7			0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.13/0.08	0.16/0.09	0.18/0.10
8				0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.15/0.09	0.16/0.09
9					0.08/-	0.10/0.06	0.10/0.06	0.15/0.09	0.15/0.09
10						0.08/0.05	0.10/0.06	0.13/0.08	0.15/0.09
11						0.08/-	0.08/0.06	0.12/0.07	0.13/0.08
12							0.08/0.05	0.12/0.07	0.13/0.08
13								0.11/0.06	0.12/0.07
14								0.10/0.06	0.12/0.07
15								0.08/-	0.11/0.06
16									0.10/0.06
17									0.08/-

General turning

Parting and grooving

Threading

Application information of threading



TURNING Threading Tools

Application information of threading

■ Table of recommended in-feed for metric ISO internal threading with wiper edge

Screw pitch	1.00	1.25	1.5	1.75	2.0	2.5	3.0	4.0	5.0
Total in-feed	0.62	0.77	0.92	1.06	1.21	0.15	1.79	2.36	2.95
Number of passes	5	6	7	8	9	11	13	15	17
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)								
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.18/-	0.20/-	0.22/-	0.23/-	0.24/-	0.25/-	0.26/-	0.30/-	0.32/-
2	0.14/0.08	0.15/0.09	0.16/0.09	0.16/0.09	0.18/0.10	0.20/0.12	0.20/0.12	0.25/0.14	0.28/0.16
3	0.12/0.07	0.12/0.07	0.14/0.08	0.14/0.08	0.15/0.09	0.15/0.09	0.20/0.12	0.22/0.13	0.25/0.14
4	0.10/0.06	0.12/0.07	0.12/0.07	0.13/0.08	0.14/0.08	0.15/0.09	0.18/0.10	0.20/0.12	0.22/0.13
5	0.08/-	0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.13/0.08	0.15/0.09	0.18/0.10	0.21/0.12
6			0.09/0.05	0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.20/0.12
7			0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.18/0.10
8				0.08/-	0.09/0.05	0.10/0.06	0.10/0.06	0.15/0.09	0.18/0.10
9					0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.15/0.09
10						0.09/0.05	0.10/0.06	0.12/0.07	0.15/0.09
11						0.08/-	0.10/0.06	0.12/0.07	0.15/0.09
12							0.08/0.05	0.11/0.06	0.15/0.09
13								0.11/0.06	0.12/0.07
14								0.10/0.06	0.11/0.06
15								0.08/-	0.10/0.06
16									0.10/0.06
17									0.08/-

General turning

Parting and grooving

Threading

Application information of threading



Table of recommended in-feed for American unified standard external threading with wiper edge

Screw pitch	24	20	18	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.649	0.779	0.866	0.974	1.113	1.299	1.416	1.558	1.731	1.948	2.226	2.597	3.116
Number of passes	5	6	6	7	9	9	10	11	12	13	14	15	16
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.206 / —	0.210 / —	0.233 / —	0.226 / —	0.196 / —	0.229 / —	0.220 / —	0.214 / —	0.210 / —	0.211 / —	0.213 / —	0.218 / —	0.229 / —
2	0.148 / 0.086	0.163 / 0.094	0.181 / 0.104	0.188 / 0.109	0.189 / 0.110	0.222 / 0.128	0.228 / 0.132	0.240 / 0.139	0.256 / 0.148	0.276 / 0.160	0.304 / 0.176	0.343 / 0.198	0.399 / 0.230
3	0.114 / 0.066	0.125 / 0.072	0.139 / 0.080	0.145 / 0.083	0.146 / 0.084	0.170 / 0.098	0.176 / 0.102	0.184 / 0.106	0.196 / 0.113	0.212 / 0.122	0.234 / 0.135	0.263 / 0.152	0.306 / 0.177
4	0.096 / 0.055	0.105 / 0.061	0.117 / 0.068	0.122 / 0.070	0.123 / 0.071	0.143 / 0.083	0.148 / 0.086	0.155 / 0.090	0.165 / 0.095	0.179 / 0.103	0.197 / 0.114	0.222 / 0.128	0.258 / 0.149
5	0.085 / 0.049	0.093 / 0.054	0.103 / 0.059	0.107 / 0.062	0.108 / 0.062	0.126 / 0.073	0.131 / 0.075	0.137 / 0.079	0.146 / 0.084	0.158 / 0.091	0.173 / 0.100	0.195 / 0.113	0.227 / 0.131
6		0.084 / 0.048	0.093 / 0.054	0.097 / 0.056	0.098 / 0.056	0.114 / 0.066	0.118 / 0.068	0.124 / 0.072	0.132 / 0.076	0.142 / 0.082	0.157 / 0.091	0.177 / 0.102	0.205 / 0.119
7				0.089 / 0.052	0.090 / 0.052	0.105 / 0.061	0.109 / 0.063	0.114 / 0.066	0.121 / 0.070	0.131 / 0.076	0.144 / 0.083	0.163 / 0.094	0.189 / 0.109
8					0.084 / 0.048	0.098 / 0.056	0.101 / 0.058	0.106 / 0.061	0.113 / 0.065	0.122 / 0.070	0.134 / 0.078	0.151 / 0.087	0.176 / 0.101
9						0.079 / 0.045	0.092 / 0.053	0.095 / 0.055	0.100 / 0.057	0.106 / 0.061	0.114 / 0.066	0.126 / 0.073	0.142 / 0.082
10								0.090 / 0.052	0.094 / 0.054	0.100 / 0.058	0.108 / 0.063	0.119 / 0.069	0.156 / 0.090
11									0.090 / 0.052	0.095 / 0.055	0.103 / 0.059	0.113 / 0.065	0.149 / 0.086
12										0.091 / 0.053	0.098 / 0.057	0.108 / 0.063	0.142 / 0.082
13											0.094 / 0.054	0.104 / 0.060	0.136 / 0.079
14												0.100 / 0.058	0.131 / 0.076
15													0.109 / 0.063
16													0.122 / 0.071

General turning

Parting and grooving

Threading

Application information of threading

A TURNING Threading Tools

Application information of threading

Table of recommended in-feed for American unified standard internal threading with wiper edge

Screw pitch	24	20	18	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.573	0.687	0.764	0.860	0.982	1.146	1.250	1.375	1.528	1.719	1.964	2.291	2.750
Number of passes	5	6	6	7	8	9	9	10	11	12	13	14	15
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.193 / —	0.200 / —	0.222 / —	0.219 / —	0.220 / —	0.228 / —	0.250 / —	0.247 / —	0.246 / —	0.252 / —	0.262 / —	0.278 / —	0.302 / —
2	0.127 / 0.073	0.239 / 0.081	0.155 / 0.089	0.161 / 0.093	0.173 / 0.100	0.190 / 0.110	0.207 / 0.120	0.216 / 0.125	0.229 / 0.132	0.247 / 0.142	0.271 / 0.156	0.304 / 0.176	0.353 / 0.204
3	0.098 / 0.056	0.107 / 0.062	0.119 / 0.069	0.124 / 0.072	0.132 / 0.076	0.146 / 0.084	0.159 / 0.092	0.166 / 0.096	0.176 / 0.101	0.189 / 0.109	0.208 / 0.120	0.234 / 0.135	0.271 / 0.156
4	0.082 / 0.048	0.090 / 0.052	0.100 / 0.058	0.104 / 0.060	0.112 / 0.064	0.123 / 0.071	0.134 / 0.077	0.140 / 0.081	0.148 / 0.086	0.160 / 0.092	0.175 / 0.101	0.197 / 0.114	0.228 / 0.132
5	0.073 / 0.042	0.079 / 0.046	0.088 / 0.051	0.092 / 0.053	0.098 / 0.057	0.108 / 0.062	0.118 / 0.068	0.123 / 0.071	0.130 / 0.075	0.141 / 0.081	0.1543 / 0.089	0.173 / 0.100	0.201 / 0.116
6		0.072 / 0.041	0.080 / 0.046	0.083 / 0.048	0.089 / 0.051	0.098 / 0.056	0.107 / 0.062	0.111 / 0.064	0.118 / 0.068	0.127 / 0.073	0.140 / 0.081	0.157 / 0.091	0.182 / 0.105
7				0.077 / 0.044	0.082 / 0.047	0.090 / 0.052	0.098 / 0.057	0.102 / 0.059	0.108 / 0.063	0.117 / 0.067	0.128 / 0.074	0.144 / 0.083	0.167 / 0.097
8					0.076 / 0.044	0.084 / 0.048	0.091 / 0.053	0.095 / 0.055	0.101 / 0.058	0.109 / 0.063	0.119 / 0.069	0.134 / 0.078	0.156 / 0.090
9						0.079 / 0.045	0.086 / 0.050	0.090 / 0.052	0.095 / 0.055	0.102 / 0.059	0.112 / 0.065	0.126 / 0.073	0.146 / 0.084
10								0.085 / 0.049	0.090 / 0.052	0.097 / 0.056	0.106 / 0.061	0.119 / 0.069	0.138 / 0.080
11									0.085 / 0.049	0.092 / 0.053	0.101 / 0.058	0.113 / 0.065	0.131 / 0.076
12										0.088 / 0.051	0.096 / 0.056	0.108 / 0.063	0.126 / 0.073
13											0.092 / 0.053	0.101 / 0.060	0.121 / 0.070
14												0.100 / 0.058	0.116 / 0.067
15													0.112 / 0.065

General turning

Parting and grooving

Threading

Application information of threading



Table of recommended in-feed for British standard internal and external threading with wiper edge

Screw pitch	28	20	19	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.581	0.813	0.856	1.017	1.162	1.355	1.479	1.626	1.807	2.033	2.324	2.711	3.253
Number of passes	5	6	6	8	8	9	9	10	11	12	14	15	16
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.179 / —	0.211 / —	0.223 / —	0.196 / —	0.223 / —	0.226 / —	0.246 / —	0.236 / —	0.230 / —	0.255 / —	0.195 / —	0.197 / —	0.204 / —
2	0.134 / 0.070	0.172 / 0.089	0.181 / 0.094	0.186 / 0.097	0.213 / 0.111	0.234 / 0.122	0.255 / 0.133	0.226 / 0.139	0.282 / 0.147	0.304 / 0.158	0.322 / 0.167	0.361 / 0.189	0.421 / 0.219
3	0.104 / 0.054	0.132 / 0.069	0.139 / 0.072	0.143 / 0.074	0.163 / 0.085	0.180 / 0.093	0.197 / 0.102	0.206 / 0.106	0.216 / 0.113	0.233 / 0.121	0.247 / 0.128	0.278 / 0.145	0.323 / 0.168
4	0.087 / 0.045	0.111 / 0.058	0.117 / 0.061	0.120 / 0.063	0.138 / 0.072	0.151 / 0.079	0.165 / 0.086	0.172 / 0.090	0.182 / 0.095	0.197 / 0.102	0.208 / 0.108	0.234 / 0.122	0.272 / 0.142
5	0.077 / 0.040	0.098 / 0.051	0.103 / 0.054	0.106 / 0.055	0.121 / 0.063	0.133 / 0.069	0.145 / 0.076	0.152 / 0.079	0.161 / 0.084	0.1738 / 0.090	0.183 / 0.095	0.207 / 0.108	0.240 / 0.125
6		0.089 / 0.046	0.093 / 0.049	0.096 / 0.050	0.110 / 0.057	0.121 / 0.063	0.131 / 0.068	0.137 / 0.071	0.145 / 0.076	0.157 / 0.082	0.166 / 0.086	0.187 / 0.097	0.217 / 0.113
7				0.088 / 0.046	0.101 / 0.052	0.111 / 0.058	0.121 / 0.063	0.126 / 0.066	0.134 / 0.070	0.144 / 0.075	0.152 / 0.079	0.172 / 0.089	0.200 / 0.104
8				0.082 / 0.043	0.093 / 0.049	0.103 / 0.054	0.113 / 0.059	0.117 / 0.061	0.124 / 0.065	0.134 / 0.070	0.142 / 0.074	0.160 / 0.083	0.186 / 0.097
9						0.097 / 0.050	0.106 / 0.055	0.110 / 0.057	0.117 / 0.061	0.126 / 0.066	0.133 / 0.069	0.150 / 0.078	0.174 / 0.091
10								0.104 / 0.054	0.111 / 0.058	0.119 / 0.062	0.126 / 0.066	0.142 / 0.074	0.165 / 0.086
11									0.105 / 0.055	0.113 / 0.059	0.120 / 0.062	0.135 / 0.070	0.157 / 0.082
12										0.108 / 0.056	0.114 / 0.060	0.129 / 0.067	0.150 / 0.078
13											0.110 / 0.055	0.124 / 0.064	0.144 / 0.075
14												0.119 / 0.062	0.138 / 0.072
15													0.115 / 0.060
16													0.129 / 0.067

General turning

Parting and grooving

Threading

Application information of threading

■ Table of recommended in-feed for NPT internal and external threading with wiper edge

Screw pitch	27	18	14	11.5	8
Total in-feed	0.75	1.129	1.451	1.767	2.54
Number of passes	6	8	10	12	14
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)				
	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.19/-	0.22/-	0.240/-	0.24/-	0.255/-
2	0.15/0.087	0.181/0.104	0.200/0.115	0.208/0.120	0.250/0.144
3	0.13/0.075	0.152/0.088	0.170/0.098	0.182/0.105	0.245/0.141
4	0.11/0.063	0.141/0.081	0.150/0.086	0.168/0.097	0.230/0.133
5	0.09/0.052	0.131/0.075	0.140/0.081	0.155/0.089	0.210/0.121
6	0.08/0.46	0.121/0.070	0.130/0.075	0.145/0.084	0.195/0.112
7		0.101/0.058	0.120/0.069	0.138/0.079	0.180/0.104
8		0.082/0.047	0.110/0.063	0.124/0.072	0.175/0.101
9			0.100/0.058	0.117/0.067	0.170/0.098
10			0.091/0.052	0.105/0.060	0.155/0.089
11				0.095/0.055	0.140/0.080
12				0.090/0.052	0.125/0.072
13					0.110/0.063
14					0.100/0.058

■ Table of recommended in-feed for BSPT internal and external threading with wiper edge

Screw pitch	28	19	14	11
Total in-feed	0.581	0.856	1.162	1.479
Number of passes	5	6	8	10
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)			
	X/Z	X/Z	X/Z	X/Z
1	0.179/-	0.223/-	0.222/-	0.214/-
2	0.134/0.070	0.181/0.094	0.213/0.111	0.242/0.126
3	0.103/0.054	0.139/0.072	0.163/0.085	0.186/0.097
4	0.087/0.045	0.117/0.061	0.138/0.072	0.157/0.082
5	0.078/0.040	0.103/0.054	0.121/0.063	0.138/0.072
6		0.093/0.049	0.110/0.057	0.125//0.065
7			0.101/0.052	0.115/0.060
8			0.094/0.049	0.107/0.056
9				0.100/0.052
10				0.095//0.049



Table of recommended cutting parameters

ISO	Material		Unit cutting force Kc0.4 N/mm ²	Hardness HB	Grade	
					YBG202 YBG203 YBG205	
Cutting speed(m/min)						
P	Carbon steel	C=0.15%	1900	125	150-175	
		C=0.35%	2100	150	140-155	
		C=0.60%	2250	200	130-145	
	Alloy steel	Anneal	2100	180	110-130	
		Hardened	2600	275	80-100	
		Hardened	2700	300	70-90	
		Hardened	2850	350	60-80	
	High alloy steel	Anneal	2600	200	90-115	
		Hardened	3900	325	70-90	
	Cast steel	Non-alloy	2000	180	180-210	
low alloy		2500	200	90-115		
High alloy		2700	225	90-115		
Martensite steel 12%Mn		3600	250	40-50		
M	Stainless steel	Austenite	2450	180	110-130	
		Martensite/Ferrite	2300	200	130-170	
K	Malleable cast iron	Ferrite	1100	130	110-140	
		Pearlite	1100	230	85-105	
	Gray cast iron	Low tensile-strength	1100	180	110-140	
		High tensile-strength	1500	260	90-115	
Nodular cast iron	Ferrite	1100	160	110-130		
	Pearlite	1800	250	80-100		
N	Al alloy	Non-aging treatment	500	60	1300-1450	
		Aging treatment	800	100	450-500	
	Cast aluminum alloy	Non-aging treatment	750	75	430-470	
Aging treatment		900	90	250-290		
S	Heat resistant alloy	Iron base	Anneal	3000	200	35-50
			Aging	3050	280	25-35
		Ni- or Co-base	Anneal	3500	250	15-25
			Aging	4150	350	10-20
Casting	4150	320	10-15			
H	Hardened steel	Hardened steel	4500	HRC55	40-50	

Note: •The values in the above table are range values. High values in the range could be considered in actual cutting. When trying new cutting speed, please check the cutting edge condition before operation.
 •In stainless steel threading, high cutting speed should be used to prevent built-up edge.
 •The cutting parameters should be reduced when cutting small pitch thread and when using tools with small nose radius.
 •When cutting thread by tools with small nose radius, such as NPT standard thread, it is advisable to use tools with big nose radius first to rough, so as to improve the life of tools with small nose radius.

General turning

Parting and grooving

Threading

Application information of threading



TURNING Threading Tools

Application information of threading


In-feed way of threading tools

- General turning
- Parting and grooving
- Threading

Application information of threading



Radial in-feed




- Easy operating, high general.
- V-shape chip caused by long chip steel workpiece will produce big bend stress on cutting edge.
- It requires low cutting depth, sharp cutting edge and good tough material.
- Big quantity of heat when cutting ,V-shape chip is hard to control.
- Because the interface of cutting chips on the right and left side is long, so it is easy to cause vibration and make the cutting edge suffer more overloading.

Flank in-feed



- Cutting edge suffer small bend stress, stable estate, it is easy for chips formation in deep cutting depth.
- There are enough space to leave chips flow when flank in-feed.
- Big abrasion on right flank.

Modified flank in-feed



- Right Cutting Edge also engage on cutting depth to a certain extent, it can reduce the abrasion on right side of clearance face.
- Cutting edge suffer small bend stress, stable estate, it is easy for chips formation in deep cutting depth.
- Good Cutting Performance.

Alternate flank in-feed



- Cutting edge trade off when machining, equality abrasion on left and right side of clearance face on cutting edge, it can improve the life of tools.
- Chips are flowing from both of right and left side, good chips flowing.
- Recommend using in big screw-pitch thread cutting.

! Recommend adopting flank in-feed or alternate flank in-feed under allowable range of machining equipment or programmer, it can eliminate the machining vibration effectively, and it has enough space discharge the chips between pitch. Cutting edge suffer a small stress, machining stable, it likes the general turning process when machining thread, good chip control without extra chips.



Common problems in threading and solutions

Problem	Cause	Solutions
Wear on clearance face	Cutting speed too high.	Reduce cutting speed.
	Low cutting depth, abrasion.	Reduce frequency of feed and friction of cutting edge.
	Inserts are over the center line.	Adopt correct center height.
Asymmetric wear on right and left cutting edge	The inclined angle of insert is different from the helical angle of thread.	Change to proper shim to get correct inclined angle.
	Flank in-feed is not correct.	Change the way of flank in-feed.
Breakage	Cutting speed too low.	Increase cutting speed.
	Cutting force too high.	Increase frequency of feed and reduce Max in-feed.
	Unstable clamping.	Check if workpiece vibrates. Reduce overhang of tool. Verify clamping of workpiece and tool.
	Chip twisting.	Increase the pressure of cooling liquid to blow away chips.
Plastic deformation	High cutting speed, high temperature on cutting area.	Reduce cutting speed. Increase feed frequency and reduce Max cutting depth.
	Insufficient cooling fluid.	Increase cooling fluid supply.
Low thread surface quality	Cutting speed too low. The insert is over the center line. Chips are not under control.	Increase cutting speed. Adjust centre height. Change the operation way of tools to well control chips.
Incorrect profile	Incorrect center height.	Adjust centre height.
	Pitch on machine is not correct.	Adjust machine.
Shallow profile	Cutting speed set wrong.	Adjust cutting depth.
Surface damage	Chips involved or contacted.	Change to flank in-feed to control chip flow direction.
Built-up edge	Temperature of cutting edge is too low. Usually occur when machining stainless steel and low carbon steel.	Increase cutting speed as well as pressure and concentration of cooling fluid. Choose inserts with good toughness.
Crack on surface	Cutting force too high	Reduce the cutting depth of each feed.
Vibration	Incorrect clamping of workpiece or tool	Verify clamping of workpiece and tool. Minimize overhang of tool.
	Incorrect cutting parameters	Increase cutting speed or reduce it substantially.
	Incorrect tool clamping	Adjust center height.

General turning

Parting and grooving


Threading

Application information of threading



The functions of each part of turning tools

1 The names of each part of turning tools

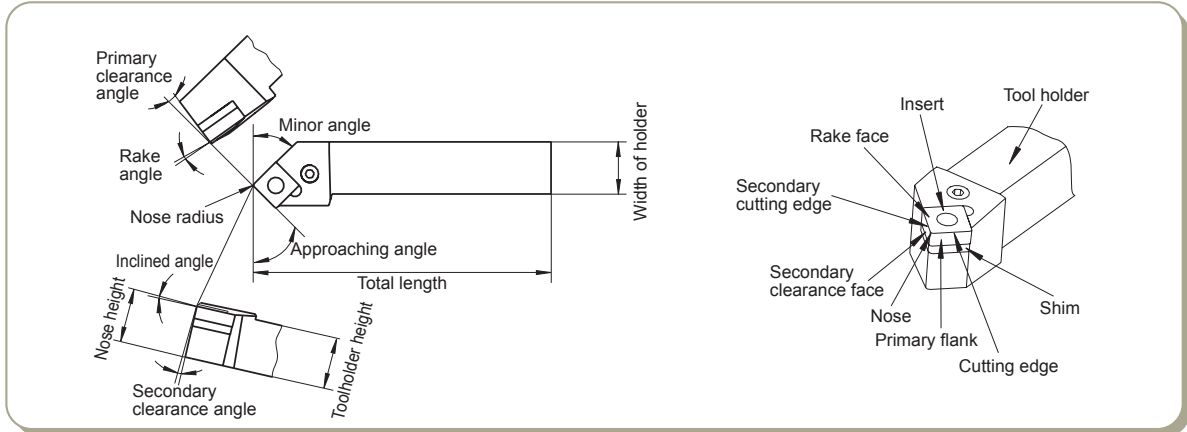

2 Effects of rake angle

Larger rake angle makes cutting edge sharper, reduces resistant forces of chip flow, diminishes friction and prevent deformation, leading to smaller cutting forces and cutting power, lower cutting temperature, less abrasion and higher surface quality. However, too large rake angle would reduce the rigidity and strength of tool. Heat can't be diffused easily. Serious breakage and abrasion on tool would occur, reducing tool life. Please choose rake angle according to machining conditions.

Value selection	Situations
Small rake angle	<ul style="list-style-type: none"> ● When machining brittle and hard materials ● When roughing and intermittent cutting
Big rake angle	<ul style="list-style-type: none"> ● When machining plastic or soft materials ● When finishing

3 Effects of clearance angle

The main function of clearance angle is to reduce the friction between the clearance face of tool and the surface of workpiece. When the rake angle is fixed, larger clearance angle can increase the sharpness of cutting edge, reduce cutting forces and friction, and then achieve higher surface quality. However, if clearance angle is too large, the strength of cutting edge would decrease. Also, heat can't be diffused easily and serious abrasion would occur, reducing tool life.


The principle of choosing clearance angle: Choose small clearance angle if friction is not serious.

Value Selection	Situations
Small clearance angle	<ul style="list-style-type: none"> ● In order to increase nose strength when roughing ● When machining brittle and hard materials
Large clearance angle	<ul style="list-style-type: none"> ● In order to reduce friction when finishing ● When machining materials easy to be hardened

4 Effects of inclined angle

Positive or negative inclined angle determines the direction of chip flow, and also affects the strength and impact resistance of insert nose.



◆As diagram (1) shows, when the inclined angle is negative, namely nose is in the lowest point as apposed to the bottom of tool, chips flow to the machined surface of workpiece.

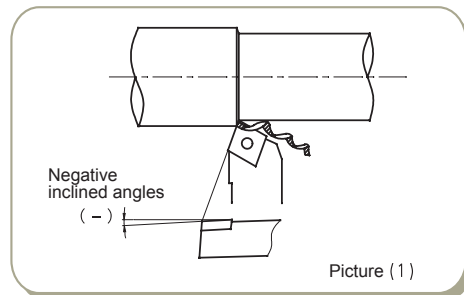



◆ As diagram (2) shows, when inclined angle is positive, namely the nose is in the highest point as apposed to the bottom of the tool, chips flow to the areas of workpiece surface that haven't been machined.

◆ The change of inclined angle also affects insert nose strength and impact resistance. When the inclined angle is negative, the nose is in the lowest point of cutting edge. When the cutting edge enters the workpiece, the contacting point is on the cutting edge or rake face, protecting the nose from impact and increase the strength of the nose. Normally, negative inclined angle should be chosen for tools with big rake angle. This can not only increase nose strength, but also prevent the impact of entry.

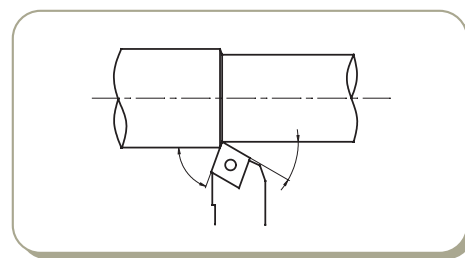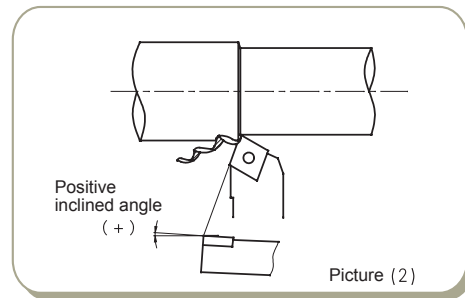

5 Effects of approach angle

Reduced approaching angle increases the strength of tools and enable heat to diffuse easily, improving surface quality. This is because when the approach angle is small, cutting edge width is large, and then the unit width of cutting edge bears less cutting force. Meanwhile, tool life can be improved.

Normally, select 90° approach angle for turning of slender and step shaft; select 45° approach angle for external turning, end surface machining and chamfering. When approach angle is larger, radial force is reduced, cutting is stable, cutting thickness is increased, and chip breaking is excellent.

Value selection	Situations
Small approach angle	For those materials with high intensity, high hardness and hardened layer on the surface
Big approach angle	When rigidity of the machine is not enough

6 Effects of minor angle

Minor angle is the main angle that can affect surface quality, and it can also affect tool strength. If the approach angle is too small, the friction between the secondary flank and machined surface of workpiece will increase, causing vibration.

The principle of selecting minor angle: Select small minor angle when roughing or when the friction is unaffected and there is no vibration. Select large minor angle when finishing.

7 Nose radius

Nose radius significantly affects nose strength and surface quality.

Large nose radius means higher cutting edge strength, and the abrasion on the rake face and clearance face can be reduced to some extent. However, if the nose radius is too large, radial force will increase, and vibration is easy to occur, affecting machining precision and surface quality.

Value selection	Situations
Small nose radius	<ul style="list-style-type: none"> ● Finishing at small cutting depth ● Machining parts such as slender shaft ● When the rigidity of the machine is not enough
Large nose radius	<ul style="list-style-type: none"> ● When roughing ● When machining hard materials (intermittent cutting) ● When the rigidity of the machine is not enough

General turning

Parting and grooving

Threading

General technical information for turning



Calculation method of turning parameters


General turning

Parting and grooving

Threading

General technical information for turning

1 Calculation of cutting speed

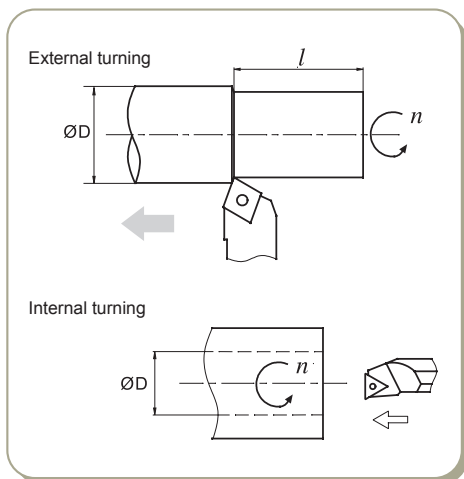


$$V_c = \frac{\pi \times D \times n}{1000} \text{ (m/min)}$$

In the formula: V_c : Cutting speed (m/min)
 n : Rotating speed of main axle (rev/min)
 D : Diameter of workpiece (mm)

For example: When the rotating speed is 280rev/min and the diameter of workpiece is 150mm, the cutting speed should be:

$$V_c = \frac{\pi \times D \times n}{1000} \text{ (m/min)} = 132 \text{ (m/min)}$$

2 Calculation of feed rate

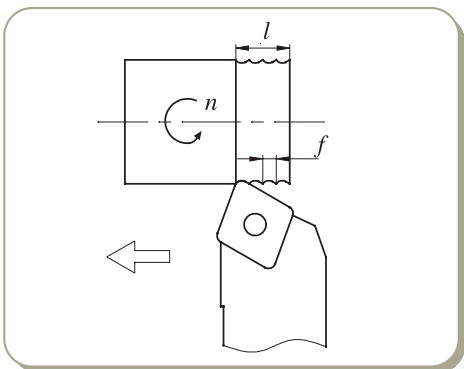

$$f = \frac{l}{n} \text{ (mm/rev)}$$

In the formula: f : Feed rate per rotation (mm/rev)
 l : Cutting length per minute (mm/min)
 n : Rotating speed of main axle (rev/min)

For example: When the rotating speed of main axle is 500rev/min, and the cutting length per minute is 100mm/min, the feed rate per rotation should be:

$$f = \frac{l}{n} = \frac{100}{500} = 0.2 \text{ (mm/rev)}$$






3 Cutting time calculation of external and internal turning

$$T = \frac{l}{f \times n} \text{ (min)}$$

In the formula: T: Cutting time (min)
 l: Length of machined areas (mm)
 f: Feed rate (mm/rev)
 n: Rotating speed of main axle (rev/min)

For example: When the rotating speed of main axle is 250rev/min, and the feed rate is 0.2mm/rev, the time needed for a cutting length of 150mm should be:

$$T = \frac{l}{f \times n} = \frac{150}{0.2 \times 250} = 3 \text{ (min)}$$

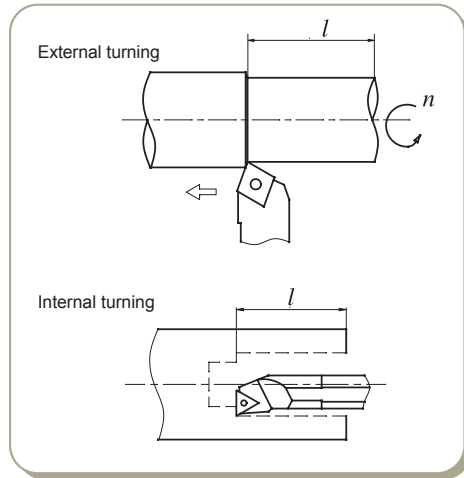

General turning

Parting and grooving

Threading


General technical information for turning

4 Time calculation for end surface turning (constant linear speed)

$$T = \frac{\pi \times (a^2 - b^2)}{4000 \times V_c \times f} \text{ (min)}$$

In the formula: T: Cutting time (min)
 V_c: Cutting speed (m/min)
 f: Feed rate (mm/rev)

For end surface without hole, b=0, the formula is still valid.

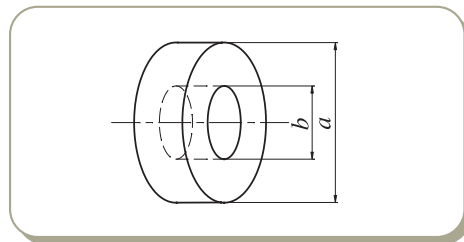


5 Theoretical value calculation of machined surface roughness

$$R = \frac{f^2}{8r_c} \times 1000 \text{ (}\mu\text{m)}$$

In the formula: R: Theoretical roughness value of machined surface
 f: Feed rate (mm/rev)
 r_c: Nose radius (mm)

For example: When the feed rate is 0.2mm/rev, and the nose radius is 0.4mm, the theoretical roughness value of machined surface should be:

$$R = \frac{f^2}{8r_c} \times 1000 = \frac{0.2^2}{8 \times 0.4} \times 1000 = 12.5 \text{ (}\mu\text{m)}$$

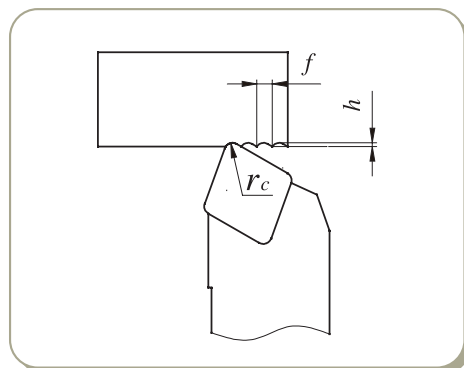



Effect of three main turning parameters on machining

General turning


Parting and grooving

Threading

General technical information for turning

Effects of three main parameters

Normally, short machining time, long tool life and high machining precision are expected in machining, so the material quality, hardness, and shape of the workpiece, and properties of machine should be fully considered, and then we can select suitable tools and adopt high-efficiency cutting parameters, namely three parameters.

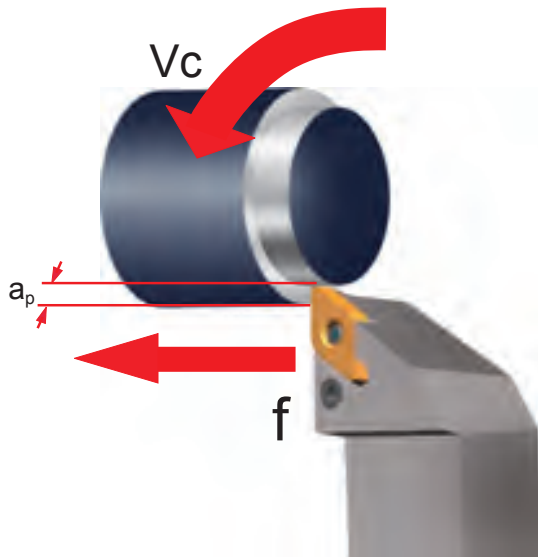

Cutting speed (V_c)

When the workpiece is rotating on the machine, the number of its rotation per minute is defined as Rotating speed of main axle (n). Because of its rotation, the cutting speed measured on the contacting point of diameter is defined as linear speed, m/min. Normally, linear speed is considered to measure the effect of cutting speed on machining.

Effect of cutting speed

Cutting speed has significant effect on tool life. When the cutting speed is increased, cutting temperature will increase and tool life will be shortened. Cutting speed varies according to the different types and hardness of workpiece. The below conclusions are reached after many cutting experiments:

(1) Normally tool life would be reduced to half when the cutting speed is increased by 20%. Tool life would be 20% of the original life if the cutting speed is raised by 50%.

(2) Low speed (20-40m/min) cutting could easily cause vibration and shorten tool life.

Feed rate (f_n)

Feed rate is defined as the moving distance of tool after workpiece rotates for one circle, measured by mm/rotation.

Effect of feed rate

Feed rate is a key factor that determines surface quality. Meanwhile it also affect the range of chip forming and the thickness of chips during machining.

In term of the effect on tool life, small feed rate leads to serious abrasion on clearance face, greatly reducing tool life.

Cutting depth (a_p)

Cutting depth is defined as the difference between machined surface and unmachined surface, measured by mm. It is half the difference value between the original diameter and machined diameter.

Effect of cutting depth

Cutting depth should be determined by the machining allowance and shape of workpiece, power and rigidity of machine, and tool rigidity.

The change of cutting depth has little effect on tool life. If the cutting depth is too low, the cutting nose only scrapes the hardened layer on the workpiece surface, reducing tool life. When there is hardened oxide layer on workpiece surface, higher cutting depth should be adopted within the possible range of machine's power to avoid cutting nose just cutting the hardened layer of workpiece.



Comparison table for turning inserts chipbreaker

Comparison table for turning insert chipbreaker

Negative inserts

ISO	Machining range	ZCCCT	SANDVIK	KORLOY	TaeguTec	WALTER	SECO	MITSUBISHI	SUMITOMO	KENAMETAL	DIJET	HITACHI	TUNGALOY	KYOCERA	VALANTTE
	For extra finishing		QF LC	HU	FA FX	FP5	FF1 FF2	PK※FH, FY FP, FS	FB FA, FL	FF		FE	01※, TF, ZF 11	DP※, GP, PP, VF, XP XP-T, XF	F1
	For finishing	DF	PF XF	HF	FG FM	MP3, FV5 NF3, NF4	MF2	LP, C SA, SH	FE, SU, LU, SX, SE	LF, FN	PF, UR UA, UT	BE, CE B, BH	NS, 27 TSF, AS, TQ	HQ, CQ PQ	F2(2B), F5(5C)
	For finishing (Soft steel)	SF		HF	FC			SY					17	XQ, XS	
	For finishing (Wiper)	WGF	WL WF	HW	WS	NF	W-MF2	SW	LUW SEW	FW			AFW, ASW FW, SW	WF WP, WQ	
	For semi-finishing	DM PM	PM QM XM	HA HC HM	PC FT MT SM MP	MF3 MV5	MF3 MF5 M3 M5	MP MA MH	GU UG UX GE	P MN	PG UB	CT AB AY AE AH	NM, ZM TM, DM 37, AM 33, 38	PG, C-J, GS, PS HS, PT	F3, F4(8A), M2(2C), M3 M4, M5(5B), M6, M7, 55, M8
	For semi-finishing (Wiper)	WGM	WMX WM		WT	NM	W-M6 W-M3 W-MF5	MW	GUW	MW RW				WE	
	For light roughing	LR(Single-site) DR(Double-site)	PR, HM XMR		RT	NM6, RP5 NM9, RP7	MR7 MR6	RP GH	MU, MX ME, UZ	RN RP	UD, GG	Y, RE	TH	RH, GT	
	For heavy roughing	HDR HPR	QR PR HR MR	HR HH	RX, HD HY, HT RT, RH HZ, EH	NR6 NRF NRR	R5, R56 R4, R6 R7, PR9 R57, RR6 R8	HM, HL HZ, HX HV, HR	MP, HG HP, HU HW, HF	MR, RM RH	UC	TE, UE HX, HE H	TU, TRS TUS	PX	R3, R4, R6(9A) R7(9B), R9(9C)

※ Periphery grinding type

Comparison table for turning inserts chipbreaker

Threading

Parting and grooving

General turning



Comparison table for turning inserts chipbreaker

General turning

Parting and grooving

Threading

Comparison table for turning inserts chipbreaker

Comparison table for turning insert chipbreaker

Negative inserts

ISO	Machining range	ZCCCT	SANDVIK	KORLOY	TaeguTec	WALTER	SECO	MITSUBISHI	SUMITOMO	KENNAMETAL	DIJET	HITACHI	TUNGALOY	KYOCERA	VALANTTE
M	For finishing	EF	MF	HA	SF	NF4, FM5	MF1	SH, LM	SU, EF	FP, LF*		MP, AB BH	SS	MQ GU	F1, F2(2B), F5(5C)
	For semi-finishing	EM	MM, QM XM, K	HS	ML, EM MM, VF	MM5 RM5 NM4	MF4	MS, ES GM, MM MA	EX, EG UP, GU HM	MP	SF, SG SZ	DE PV SE AH	SF, SA, SM, S	MS, MU SU, HU, ST, TK	F3, F4(8A), M2(2C), M3 M4, M5(5B), M6, M7, 55, M8
	For roughing	ER	MR	GS, HM	MT	NR4 NR5	M5, MR7 RR6	GH, HZ RM, HL	EM, MU MP	UP RP		AE	TH, SH		R3, R4, R6(9A) R7(9B), R9(9C)
K	For finishing	PM	KF			MK5	MF2, M3 MF5, M4	VA AH		FN		VA, AH	CF	KQ	F2(2B)
	For Semi-Finishing	PM	KM	Through chip-breaker, HM	MC	RK5 NM5	M5	V AE	UZ, GZ UX	RP, UN	PG	V, AE	CM	KG, C	M5(5B), M6, M8
S	For roughing	Without chip-breaker	KR KRR	GR, HR GH	KT	RK7		RE			GG	RE		KH, GC	R3, R4, R7(9B)
	For finishing	NF/NGF	SF SGF*		EA	NF4, NFT MS3	MF5, MF1 MF4	FJ*, LS MJ, MJ*	EF, SU*	FS, LF*, MS			HRF	MQ	F5(5C), M2(2C)
	For semi-finishing	NM	NGP*, SM			NMT, NMS	M1	MS	EG, EX SU*, UP	NGP*, UP, P		VI	HRM, SA HMM	SQ, MS MU, TK	M4, M5(5B), M7, 55
For roughing	SNR	SR SMR		ET	NRS NRT	MR3 MR4	GJ RS	MU	RP				SG SX		

* Periphery grinding type



Comparison table for turning inserts chipbreaker

Comparison table for turning insert chipbreaker															
Positive inserts															
ISO	Machining range	ZCCCT	SANDVIK	KORLOY	TaeguTec	WALTER	SECO	MITSUBISHI	SUMITOMO	KENAMETAL	DIJET	HITACHI	TUNGALOY	KYOCERA	VALANTTE
P	For finishing	SF, HF	PF, UF XF	HFP	FA, FG FX	PF4 FP4	FF1 F1	FV, SV FP, LP	FP, LU SU, SK	11, UF LF, FP		JQ	PF, PSF PS, PSS	GP, XP VF, PP	PF4 JQ, JZ
	For finishing (Wiper)		WF			PF2* PF, PF5*	W-F1	SW	LUW SDW	FW				WP	
M	For semi-finishing	HM	UM, XM PM, PR XR	HMP C25	MT, PC	PS5 PM5 FP6	F2 MF2, M5	MV, MP	MU	MF, MP	FT	JE	PM 23, 24	HQ, XQ GK MF*	PM2 PM4
	For semi-finishing (Wiper)		WM		WT	PM	W-F2 W-M3	MW		MW					
K	For finishing	EF	MF	HFP		FM4	F1, F2	FM, LM	FC*, SI* LU, SU	MF		MP	PF, PSF PS, PSS	CF*, CK* GQ*, GF* MQ, SK	1A, 2A
	For semi-finishing	EM	MM	HMP C25		MM4 RM4		MM	MU	MP			PM	HQ GK	PM2 PM4
S	For semi-finishing	HM, HR without chip-breaker	KF KM KR	HMP C25		FK6	F1 M3, M5	MK Without chip-breaker	MU Without chip-breaker	Without chip-breaker			CM Without chip-breaker	Without chip-breaker*	PM2 PM4
	For finishing/ For semi-finishing	NGF						FS*, LS* FJ*, FSP* LS-P*	SL*	LF* HP*				MQ	PM2, 1A 2A
N	For general turning	LH	AL	TAAK MA	FL	PM2, FN2 MN2	AL*	AZ*	AG	HP*	ALU ACB ASF		AL*	AH*	1L, 1A 2A

* Periphery grinding type

Comparison table for turning inserts chipbreaker

Threading

Parting and grooving

General turning